




established in 1996





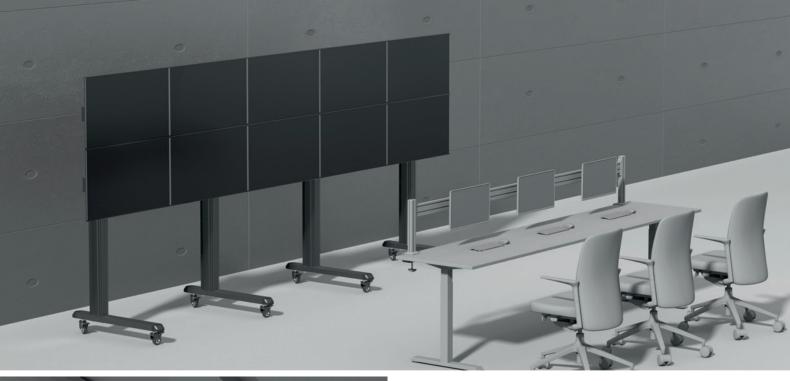



THE MODULAR SOLUTION for digital signage

Modular solutions save time and money by offering designers and installers the ultimate in versatility.

HAGOR Products offers components that can be configured as ceiling mounts, stand systems or wall solutions.

The comPROnents® series offers endless possibilities for a wide range of applications - including retail, broadcast, education, transportation, and more!







With the comPROnents® series, HAGOR has created a smart solution to generate almost any desired configuration for screens and LED solutions with just a few modular components.

All components are made of high-quality aluminum or steel and are designed in a way that everything fits together perfectly and your installations can be carried out as quickly as possible.

Discover solutions for wall, ceiling or floor mounting, for example, that can be easily combined in order to be able to generate individual installation options, such as menu boards or video wall situations, with great flexibility.

With the comPROnents® series, in connection with your digital signage content, you can create optical highlights that immediately become an eye-catcher for every target group.

With the "WOW-Effect" you will attract attention to new products, promotional content or important information.

Put together your own individual solution and get started right away. Thanks to the effortless assembly technology, your spectacular digital signage content will become the highlight you deserve, on a low budget.

Our goal is to consistently improve and develop digital signage products that increase installation flexibility and at the same time increase sales and profits for our customers.

AV-Mounting? We take care!

Telephone: +49 (0) 57 31 - 7 55 07-0 Email: compronents@hagor.de

MODULAR SETUP - UNLIMITED POSSIBILITIES -


- **✓** Wall mounts single
- **✓** Wall mounts multiple
- ✓ Ceiling mounts single
- Ceiling mounts multiple
- ✓ Menu board mounts wall
- Menu board mounts ceiling
- **✓** Floor-to-Ceiling mounts single
- **✓** Floor-to-Ceiling mounts multiple
- ✓ Floor-to-Wall mounts
- ✓ Video wall mounts wall

- Video wall mounts ceiling
- ✓ Video wall mounts stand systems
- **✓** Stand systems free standing single
- **✓** Stand systems free standing multiple
- **✓** Stand systems mobile single
- ✓ Stand systems mobile multiple
- **✓** LED mounts wall
- V LED mounts ceiling
- ✓ LED mounts floor-to-wall
- ✓ LED mounts free standing



Installation example: Menu board ceiling mount 4x1 portrait



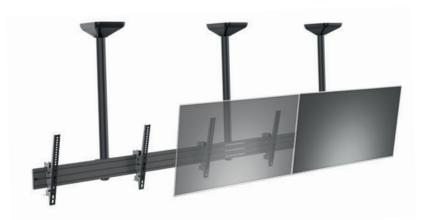

Installation example: Menu board ceiling mount 3x1 landscape

comPROnents® Series

Modular setup - unlimited possibilities

The following scheme gives an overview of the components required for a ceiling installation.



1 RAIL ADAPTER

Connects the aluminium rails with the selected poles. Optionally available as a single or back-to-back solution.

VESA ADAPTERARME

Choose whether you prefer a fixed, tiltable or finely adjustable solution for the VESA arms.

- 3 CEILING FIXTURE
- 4 POLES


Choose between standard poles or poles with weight compensation function.

5 ALUMINIUM RAILS

Choose between three different lengths according to your individual needs. A connection with each other is guaranteed by the connectors included in the scope of delivery.



POLES

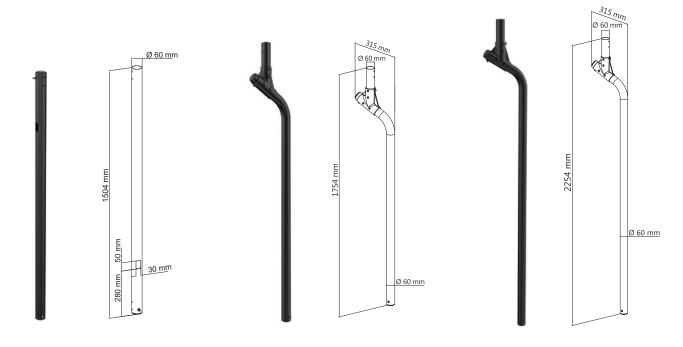

CPS - POLE 1500 mm Ø 60 mm Item no.: 3214 CPS - POLE 1750 mm
FOR MULTISCREEN INSTALLATION
Item no.: 3215

CPS - POLE 2250 mm
FOR MULTISCREEN INSTALLATION
Item no.: 3216

INFO -

Specific & Professional

The HAGOR comPROnents® series offers the right components for almost every application. No matter if it is a single or dual application or a video wall - the individual parts can be optimally combined to create the required assembly solution.



Creating multi-screen solutions with straight poles on top of each other (as is often offered in the market) can lead to security problems as the solutions tilt over time, resulting in misalignment of the information displayed.




Using poles with a weight compensation function ensures long-term alignment and safety of the system.



Straight poles are ideal for a single row of displays.






CPS - ALU RAIL 500 mm Item no.: 3210





CPS - ALU RAIL 700 mm Item no.: 3211



CPS - ALU RAIL 1000 mm Item no.: 3212

INFO -


Connection of the aluminium rails

The aluminum rail connectors included in the scope of delivery create endless configurations for almost any environment. The stability among each other remains completely intact and does not affect the load capacity or safety in any way.



CEILING PLATE —





CPS - CEILING PLATE WITH COVER Item no.: 3217

INFO -

Ceiling mount module


The stable ceiling plate provides a solid foundation for the poles and contains keyhole slots that allow them to be pushed on and screwed in quickly. The cover included in the scope of delivery rounds off the system and creates an elegant finish!





RAIL ADAPTER SINGLE






CPS - RAIL ADAPTER FOR POLE-SERIES
Item no.: 3218

RAIL ADAPTER DUAL





CPS - BACK TO BACK RAIL ADAPTER FOR POLE-SERIES Item no.: 3226

INFO


Possible installations on the POLE series:


The high-quality adapters for the poles enable the aluminum rails to be mounted on one or both sides. This means that back-to-back installations can also be created very easily in order to create a double-sided advertising-effective digital signage presentation.



VESA ADAPTER ARMS | MICRO ADJUSTABLE







CPS - MICROADJUSTABLE ARMS VESA 400 Item no.: 3201

VESA ADAPTER ARMS | TILTABLE 000000 û 0

- Optional secure part available | SECURE PART FOR TILT ARMS-SERIES | Item-No.: 3227 (see page 35) -

CPS - TILT ARMS VESA 400

Item no.: 3220

INFO

Perfect fine adjustment


CPS - TILT ARMS VESA 200

Item no.: 3219

Each mount offers fine adjustment in height to ensure that the screens are perfectly aligned, resulting in a nearly seamless appearance.


Our tiltable VESA amrs (figure 1) enable comfortable viewing - perfect for menu boards and other display installations that are installed high.

The micro adjustable VESA arms (figure 2) are perfect for video wall or other multiple solutions due to the additional depth adjustment.



CPS - TILT ARMS VESA 600

Item no.: 3221

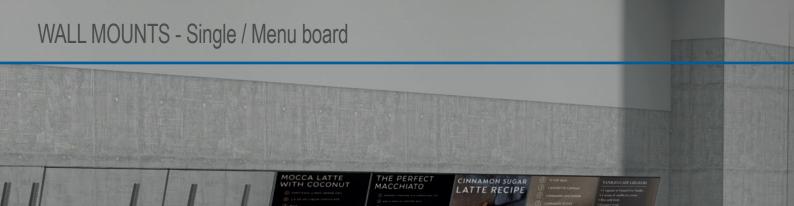





The following scheme gives an overview of the components required for a wall installation.

COFFEE

- 1 VESA ADAPTER ARMS
 Choose whether you prefer a fixed, tiltable or fine adjustable solution for the VESA arms.
- WALL FIXTURE
- 3 ALUMINIUM RAILS
 Choose between three different lengths according to your individual needs.
 A connection with each other is guaranteed by the connectors indcluded in the scope of delivery.

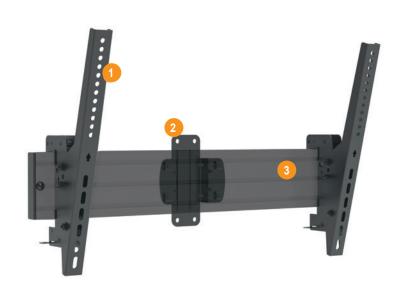






CPS - ALU RAIL 500 mm Item no.: 3210





CPS - ALU RAIL 700 mm Item no.: 3211



CPS - ALU RAIL 1000 mm Item no.: 3212

INFO -


Connection of the aluminium rails

The connectors for the aluminium rails included in the scope of delivery create endless configurations for almost any environment. The stability among each other remains completely intact and does not affect the load capacity or safety in any way.



WALL PLATE -






CPS - RAIL ADAPER FOR WALL MOUNTING Item no.: 3213


VESA ADAPTER ARMS | MICRO ADJUSTABLE -







CPS - MICROADJUSTABLE ARMS VESA 400 Item no.: 3201

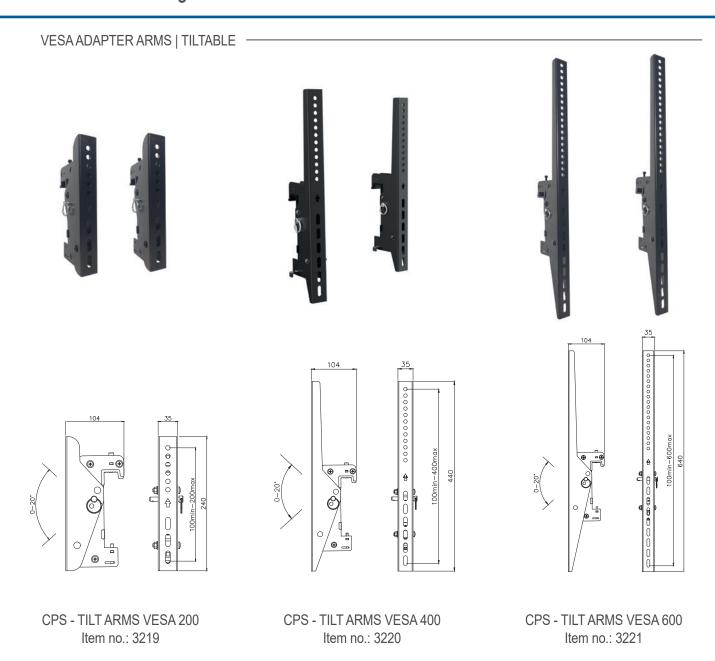

- Optional secure part available | SECURE PART FOR TILT ARMS-SERIES | Item-No.: 3227 (see page 35) -


INFO

Perfect fine adjustment

Each mount offers fine adjustment in height to ensure that the screens are perfectly aligned, resulting in a nearly seamless appearance.

Our tiltable VESA amrs (figure 1) enable comfortable viewing perfect for menu boards and other display installations that are installed high.

The micro adjustable VESA arms (figure 2) are perfect for video wall or other multiple solutions due to the additional depth adjustment.



FLOOR-TO-WALL MOUNTS & VIDEO WALL STAND SYSTEMS



comPROnents® Series Modular setup - unlimited possibilities

The following scheme gives an overview of the components required for a floor-to-wall mount.





WALL MOUNTING KIT Included for extra security.



BASE PLATE
An ideal choice when space is limited.



VIDEO WALL STAND SYSTEMS

Installation example: Video wall stand system for floor-to-wall mounting 2x2 landscape






Fine adjustment in height



Fine adjustment in depth






Tilt compensation function





incl. cable management





CPS - FLOOR TO WALL ADAPTER (BOLT-DOWN) Item no.: 3205

INFO -

The set for floor to wall mounting enables the aluminium pillars to be attached to an existing wall in a practical and space saving manner in a few simple steps.

Due to the ingenious wall angle, take measure on the floor is also not a problem, as the depth can be adjusted later. Furthermore, we enable perfect access to your cable management.






SINGLE LEVELING FEET -


LOCKING CASTERS












CPS - LOCKING CASTER SET FOR LEVELING FEET-SERIES Item no.: 3208

FLOOR-TO-WALL MOUNTS & VIDEO WALL STAND SYSTEMS

ALU PILLAR

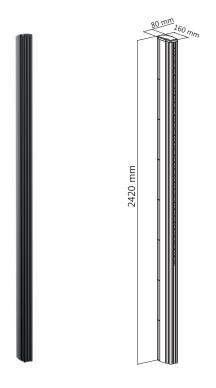


CPS - ALU PILLAR 2400 mm (CUTTABLE TO DESIRED LENGTH) Item no.: 3207

INFO -

The high-quality aluminium columns impress with their light weight paired with maximum stability. On the back, the cables can be routed almost invisibly in the profile and, if necessary, can be run in different positions. Upon request, the columns are also available in the dimensions you require.








RAIL ADAPTER FOR ALU PILLAR -





CPS - RAIL ADAPTER FOR ALU PILLAR Item no.: 3209

INFO

The high-quality adapters for the aluminium pillars enable the aluminium rails to be installed quickly and easily. Thanks to the ingenious profile, you can place a large number of these adapters on top of each other and thus also enable multiple screens to be installed on top of each other. There are no limits to you.
















CPS - ALU RAIL 500 mm Item no.: 3210

CPS - ALU RAIL 700 mm Item no.: 3211

CPS - ALU RAIL 1000 mm Item no.: 3212

INFO -

Connection of the aluminium rails

The connectors for the aluminium rails included in the scope of delivery create endless configurations for almost any environment. The stability among each other remains completely intact and does not affect the load capacity or safety in any way.




VESA ADAPTER ARMS | MICRO ADJUSTABLE -










CPS - MICROADJUSTABLE ARMS VESA 400 Item no.: 3201

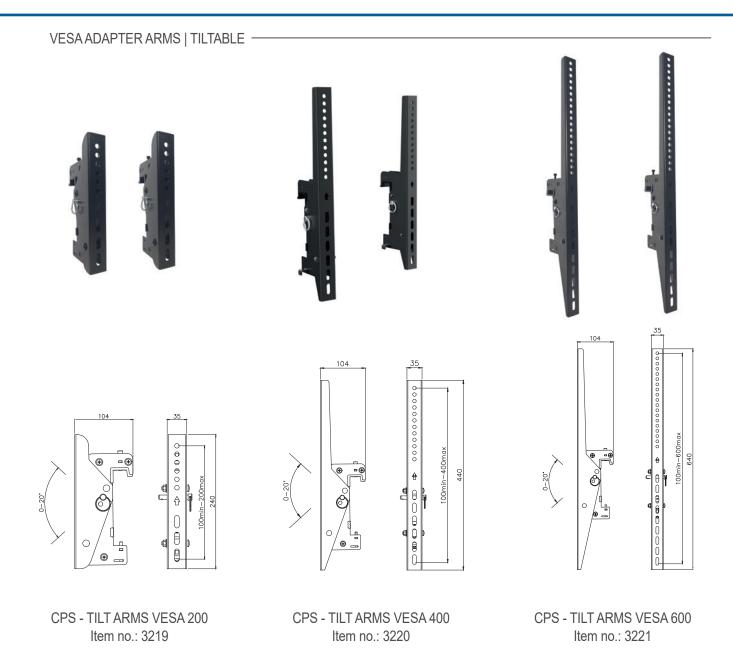

- Optional secure part available | SECURE PART FOR TILT ARMS-SERIES | Item-No.: 3227 (see page 35) -


INFO

Perfect fine adjustment

Each mount offers fine adjustment in height to ensure that the screens are perfectly aligned, resulting in a nearly seamless appearance.

Our tiltable VESA amrs (figure 1) enable comfortable viewing perfect for menu boards and other display installations that are installed high.

The micro adjustable VESA arms (figure 2) are perfect for video wall or other multiple solutions due to the additional depth adjustment.





comPROnents® Series Modular setup - unlimited possibilities



VESA ADAPTER ARMS CPS - MICROADJUSTABLE ARMS VESA 400 CPS - TILT ARMS VESA 200 Item no.: 3201 Item no.: 3219 **ALU PILLAR** -80 mm 160 mm CPS - ALU PILLAR 2400 mm (CUTTABLE TO DESIRED LENGTH) | Item no.: 3207 SINGLE LEVELING FEET -FREESTANDING LEVELING FEET -- FLOORBASE

CPS - FREESTANDING

LEVELING FEET

Item no.: 3206


CPS - SINGLE

LEVELING FEET


Item no.: 3203

CPS - FLOORBASE


Item no.: 3204



CPS - TILT ARMS VESA 400 Item no.: 3220




CPS - TILT ARMS VESA 600 Item no.: 3221



CPS - FIXED ARMS VESA 800 FOR TWO RAILS (Heavy Duty) Item no.: 3202



3 RAIL ADAPTER FOR ALU PILLAR -



CPS - RAIL ADAPTER FOR ALU PILLAR | Item no.: 3209








CPS - ALU RAIL 500 mm | Item no.: 3210

LOCKING CASTERS





CPS - LOCKING CASTER SET FOR LVELING FEET-SERIES Item no.: 3208





CPS - ALU RAIL 700 mm | Item no.: 3211



CPS - ALU RAIL 1000 mm | Item no.: 3212



1 RAIL ADAPTER

Connects the aluminium rails with the selected tubes. Optional available as a single or back-to-back solution.

2 VESA ADAPTER ARMS

Choose whether you prefer a fixe tiltable or fine adjustable solution for the VESA arms.

- 3 CEILING- AND FLOOR-FIXTURE
- 4 POLES

Choose between standard poles or poles with weight compensation function.

5 ALUMINIUM RAILS


Choose between three different lengths according to your individual needs. A connection with each other is guaranteed by the connectors included in the scope of delivery.



POLE CONNECTOR -








CPS - POLE CONNECTOR Item no.: 3222

CEILING PLATE





CPS - CEILING PLATE WITH COVER Item no.: 3217

INFO -

Ceiling mount module


The stable ceiling plate provides a solid foundation for the poles and contains keyhole slots that allow them to be pushed on and screwed in quickly. The cover included in the scope of delivery rounds off the system and creates an elegant finish!





RAIL ADAPTER SINGLE






CPS - RAIL ADAPTER FOR POLE-SERIES Item no.: 3218

RAIL ADAPTER SINGLE





CPS - BACK TO BACK RAIL ADAPTER FOR POLE-SERIES Item no.: 3226

RAILS -






CPS - ALU RAIL 500 mm Item no.: 3210





CPS - ALU RAIL 700 mm Item no.: 3211



CPS - ALU RAIL 1000 mm Item no.: 3212


INFO -

Connection of the aluminium rails


The connectors for the aluminium rails included in the scope of delivery create endless configurations for almost any environment. The stability among each other remains completely intact and does not affect the load capacity or safety in any way.



VESA ADAPTER ARMS | MICRO ADJUSTABLE

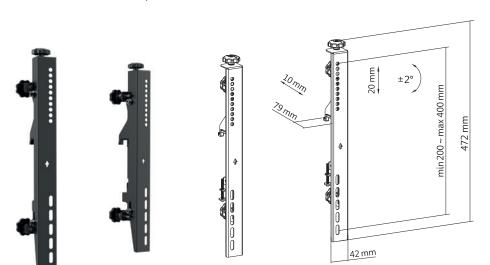

CPS - MICROADJUSTABLE ARMS VESA 400 Item no.: 3201

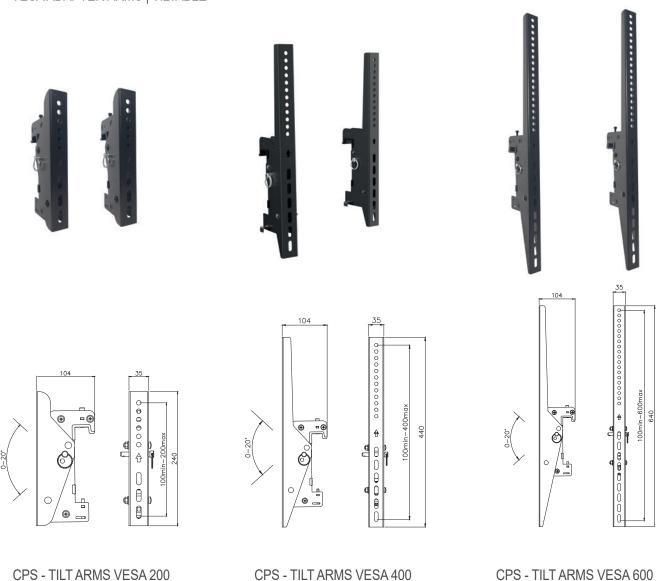

- Optional secure part available | SECURE PART FOR TILT ARMS-SERIES | Item-No.: 3227 (see page 35) -

Item no.: 3220

INFO -


Perfect fine adjustment

Item no.: 3219


Each mount offers fine adjustment in height to ensure that the screens are perfectly aligned, resulting in a nearly seamless appearance.

Our tiltable VESA amrs (figure 1) enable comfortable viewing perfect for menu boards and other display installations that are installed high.

The micro adjustable VESA arms (figure 2) are perfect for video wall or other multiple solutions due to the additional depth adjustment.



Item no.: 3221

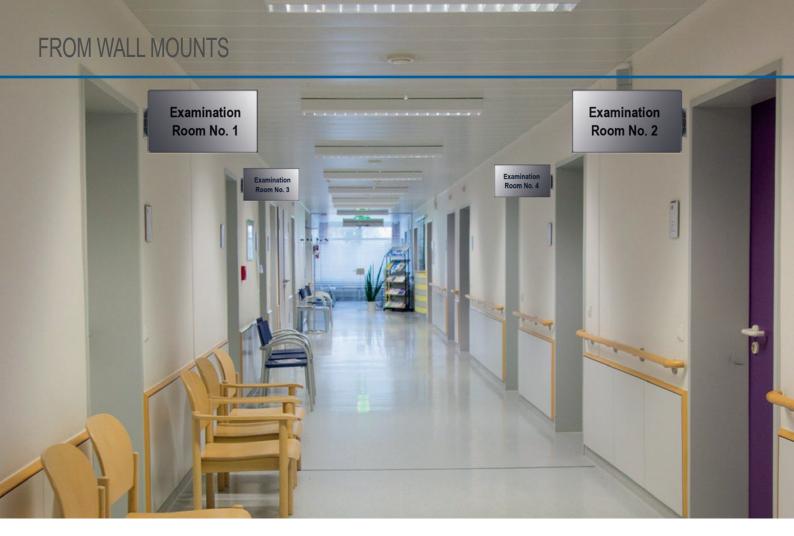





WALL ADAPTER

Fastens the aluminium rails in the selected length from the wall into the room. Optionally available as a single or back-to-back solution.

VESA ADAPTER ARMS

Choose whether you prefer a fixed, tiltable or finely adjustable solution for the VESA arms.

3 ALUMINIUM RAILS

Choose between three different lengths according to your individual needs. A connection with each other is guaranteed by the connectors indcluded in the scope of delivery.






CPS - SINGLE RAIL ADAPTER FOR FROM WALL INSTALLATION Item no.: 3223



CPS - BACK TO BACK RAIL ADAPTER FOR FROM WALL INSTALLATION Item no.: 3225

RAILS -






CPS - ALU RAIL 500 mm Item no.: 3210





CPS - ALU RAIL 700 mm Item no.: 3211







CPS - ALU RAIL 1000 mm Item no.: 3212

VESA ADAPTER ARMS

















CPS - TILT ARMS VESA 600



CPS - TILT ARMS VESA 200 CPS - TILT ARMS VESA 400 Item no.: 3219

Item no.: 3220


Item no.: 3221

CAMERA HOLDER ——




CPS - CAMERA HOLDER Item no.: 3200

CISCO ROOM-KIT ADAPTER —



CISCO ROOM-KIT ADAPTER 55 - 75" | Item no.: 1925 75 - 86" | Item no.: 2900


CISCO ROOM-KIT ADAPTER WEBEX BOARD ——



CISCO ROOM-KIT ADAPTER WEBEX BOARD

55" | Item no.: 2901 70" | Item no.: 2902 85" | Item no.: 2903

POLY DISPLAY ADAPTER —




POLY DISPLAY ADAPTER 55 - 75" | Item no.: 2286 75 - 86" | Item no.: 2287

LS-1 SOUNDBAR -




LS-1 SOUNDBAR Item no.: 8900

CISCO ROOM-KIT ADAPTER DUAL -



CISCO ROOM-KIT ADAPTER DUAL 55", 65", 75" | Item no.: 2282 75 - 86" | Item no.: 2904

MEETUP DISPLAY ADAPTER ————



MEETUP DISPLAY ADAPTER 55 - 75" | Item no.: 2278 80 - 86" | Item no.: 2279








- Tailored to all LED cabinets from all manufacturers
- Fast and uncomplicated assembly thanks to mostly pre-assembled elements
- → Short term availability
- Substructures individually adaptable to all on-site situations



- Including 3D fine adjustment options (H|W|D) on the substructure and on the individual LED cabinet (depending on the manufacturer)
- If required, the system can also be covered with blind frames in a RAL colour of your choice to encase the entire system
- Optionally also with a clever assembly template set for a quick installation

INSTALLATION EXAMPLE BOLT-DOWN

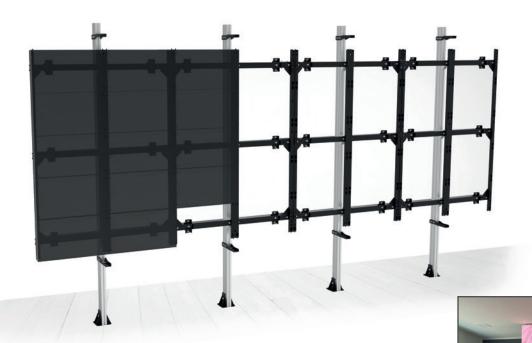


Installation example: Bolt-down, showroom M-Medientechnik / Samsung The Wall

INSTALLATION EXAMPLE WALL




INSTALLATION EXAMPLE 5x5 wall Samsung IER series

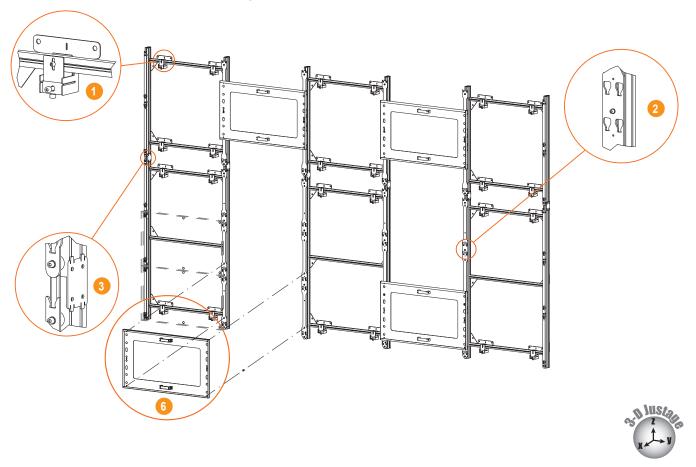

INSTALLATION EXAMPLE 5x4 bolt-down LG LSBA025

- fine adjustment of the frame in height, width and depth
- stable mounting plate including keyhole (material thickness 4 mm)
- vertical connector for easy plug-in assembly
- 4x depth adjustment per single cabinet via adjustable suspension bolts (depending on the LED cabinet type)
- stable mounting plate including keyhole (material thickness 4 mm)
- Mounting template for quick and easy assembly

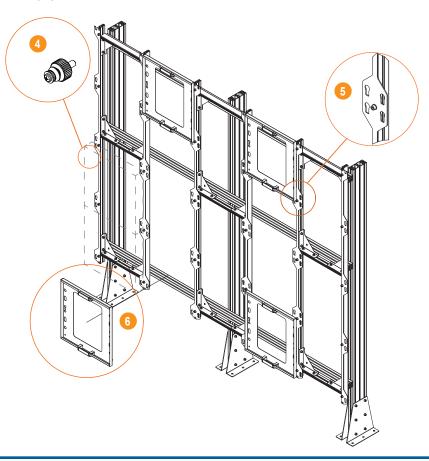



CPS - FREESTANDING LEVELING FEET

Item no.: 3206



CPS - SINGLE LEVELING FEET

Item no.: 3203



CPS - FLOORBASE

Item no.: 3204



CPS - LOCKING CASTER SET FOR LEVELING FEET-SERIES

Item no.: 3208



CPS - FLOOR TO WALL ADAPTER (BOLT-DOWN)

Item no.: 3205



CPS - ALU PILLAR 2400 mm

(CUTTABLE TO DESIRED LENGTH)

Item no.: 3207



CPS - RAIL ADAPTER FOR ALU PILLAR

Item no.: 3209



CPS - RAIL ADAPTER FOR WALL MOUNTING

Item no.: 3213




CPS - SINGLE RAIL ADAPTER FOR FROM WALL INSTALLATON

Item no.: 3223



CPS - BACK TO BACK RAIL ADAPTER FOR FROM WALL ISTALLATION

Item no.: 3225

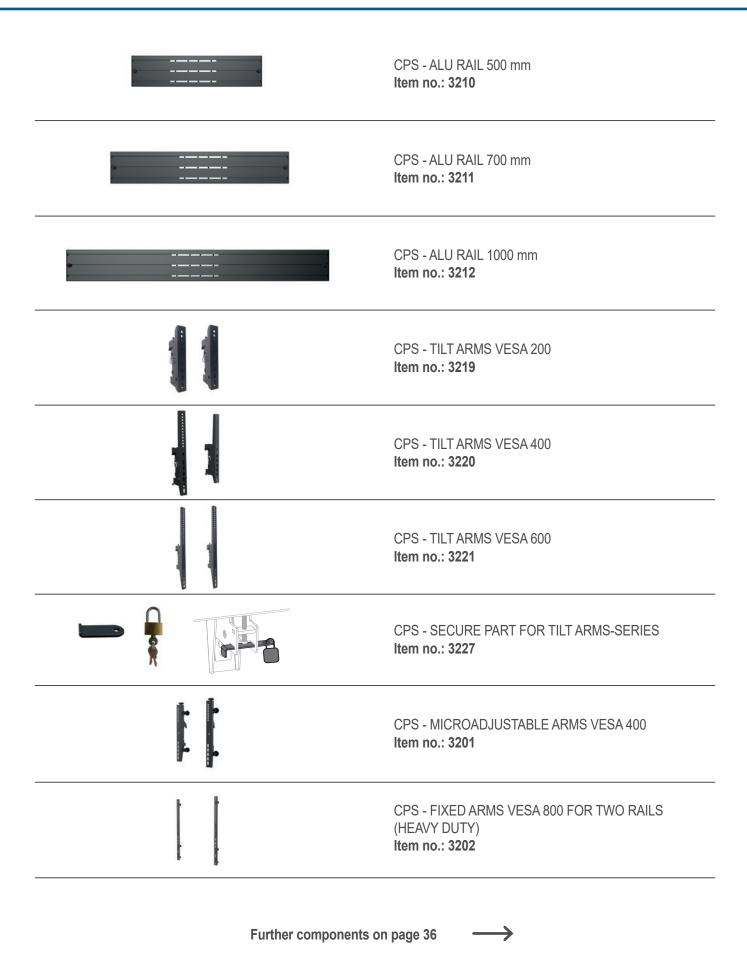









established in 1996



Table of Contents - main catalogue

CON-Line [®] Media Furniture	40 - 43
Floor stand, motorized	44 - 49
Floor stand, counterbalanced	50 - 51
Info Tower Series	52 - 57
Floor stand	58 - 65
Wall Mounts, fixed	66 - 67
Wall Mounts, tiltable	68 - 69
Wall Mounts, Full motion	70 - 72
Wall Mounts, rotatable	73
Wall Mounts, motorized	74
Wall Mounts, counterbalanced	75
Mounting Systems, display specific	76 - 82
Special Mounts	83
Ceiling Mounts, single	84 - 86
Ceiling Mounts, dual	87 - 87
Ceiling Mounts Accessories	88
Adapters & Accessories	89
Table Stands	90
Video Wall Mounts, modular	91 - 94
Video Wall, mounting frame	95

Video Wall Trolleys	96 - 97
VWS Cube	98 - 99
Totems, outdoor	100 - 101
Enclosures, outdoor	102 - 103
Fire & smoke protection	104 - 105
Totems, indoor	106 - 108
Enclosures, indoor	109
Information Totems, indoor	110
Projector Mounts	111 - 112
Projector Mounts, lift systems	113
Tablet Protective Enclosures	114 - 115
Desktop Screen Mounts, gas lift arms	116 - 117
Desktop Screen Mounts, spring system	118
Desktop Screen Mounts, screw / clamp as	ssembly 119
Desktop Screen Mounts, free standing	120
Cable Management, cable covers	121
Cable Management, cable socks	122 - 123
References	124 - 125
Sales Team	126

CON-Line® ST1

Media furniture

- electromotive height adjustment
- cable routeing via cable drag chain
- collision prevention
- integrated plugbar with safety switch
- push-button for mounting under the screen, for instance
- mobile thanks to robust castors (2x with lockable brake)
- manoeuvrable through room doors
- height: 1185 min. to 1685 mm max. (centre of screen)
- circumferential edge protection
- doors and drawers with softclosing dampers
- decor customizable on request









		recommended screen size		Load (max.)	Colour
1897	CON-Line ST1	55 - 86" 140 - 218 cm	max. 800 x 600 mm	140 kg	

CON-Line® T2 Dual Series

Media furniture

- for 2 screens "side-by-side"
- screen height can be selected in detents (tool needed)
- height: 1250 min. to 1600 mm max. (centre of screen)
- internal cable routeing
- mobile thanks to robust castors (2x with lockable brake)
- manoeuvrable through room doors
- circumferential edge protection
- doors and drawers with softclosing dampers
- removable tower cover
- optionally extendable to VESA 900 x 600 mm
- decor customizable on request







Item no.:		recommended screen size		Load (max.)	Colour
1953	CON-Line T2 Dual	2x 46 - 55" 116 - 140 cm	max. 600 x 400 mm	100 kg (2x 50 kg)	
2102	CON-Line T2 Dual XL	2x 65" 165 cm	max. 600 x 400 mm	100 kg (2x 50 kg)	

CON-Line® T2

Media furniture

- screen height can be selected in detents (tool needed)
- height: 1250 min. to 1600 mm max. (centre of screen)
- internal cable routeing
- mobile thanks to robust castors (2x with lockable brake)
- manoeuvrable through room doors
- circumferential edge protection
- doors and drawers with softclosing dampers
- removable tower cover
- optionally extendable to VESA 900 x 600 mm
- decor customizable on request









Installation	example	with	Room	Kit	adanter
IIIStaliation	CAUITIPIC	AAICII	1 (00111	LVIL	adaptor

Item no.:		recommended screen size	VESA	Load (max.)	Colour
1952	CON-Line T2	55 - 86" 140 - 218 cm	max. 600 x 400 mm	100 kg	

CON-Line® T1 Dual

Media furniture

- for 2 screens "side-by-side"
- screen height can be selected in detents (tool needed)
- height: 1250 min. to 1600 mm max. (centre of screen)
- internal cable routeing
- mobile thanks to robust castors with lockable break
- manoeuvrable through room doors
- circumferential edge protection
- doors and drawers on the right side with softclosing dampers
- removable tower cover
- decor customizable on request







Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
1956	CON-Line T1 Dual	2x 46 - 55" 116 - 140 cm	max. 600 x 400 mm	80 kg (2x 40 kg)	

CON-Line® T1

Media furniture

- screen height can be selected in detents (tool needed)
- height: 1250 min. to 1600 max. (centre of screen)
- internal cable routeing
- mobile thanks to robust castors with lockable break
- manoeuvrable thorugh room doors
- circumferential edge protection
- doors and drawers on the right side with softclosing dampers
- removable tower cover
- optionally extendable to VESA 900 x 600 mm
- decor customizable on request









Item no.:		recommended screen size		Load (max.)	Colour
1954	CON-Line T1	55 - 75" 140 - 191 cm	max. 600 x 400 mm	80 kg	

CON-Line® W1

Media furniture

- for wall installation
- screen height can be selected in detents (tool needed)
- internal cable routeing
- doors and drawers on the right side with softclosing dampers
- removable tower cover
- optionally extendable to VESA 900 x 600 mm
- decor customizable on request





Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
1955	CON-Line W1	55 - 75" 140 - 191 cm	max. 600 x 400 mm	60 kg	


CON-Line® KA-1

Camera shelf available as an option

- usable with media furniture of CON Line series (T1, T2 and W1)
- with universal oblong hole to lock the camera in position
- continuously height adjustable (tool needed)
- can be mounted above and beneath the screen
- maximum load: 10 kg



Item no.:		recommended screen size		Colour
1374	CON-Line KA-1	bis max. 75" 191 cm	W 324 x T 250 mm	

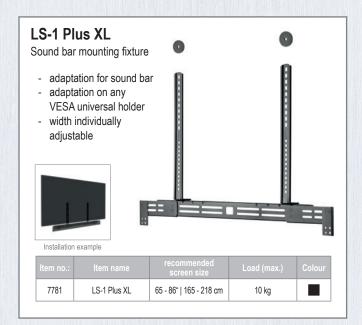

Cisco Room Kit Adapter

Universal adapter

- suitable for:
 - -Cisco Webex Room Kit Mini
 - -Cisco Webex Room Kit
 - -Cisco Webex Room Kit Plus
- continuosly height adjustable
- powder-coated
- can be mounted above and beneath the screen



Item no.:		recommended screen size		Colour
1925	Cisco Room-Kit Adapter 55 - 75"	55 - 75" 140 - 191 cm	800 mm	
2900	Cisco Room-Kit Adapter 75 - 86"	75 - 86" 191 - 218 cm	800 mm	
2282	Cisco Room-Kit Adapter Dual	2x 55 - 75" 140 - 191 cm	800 mm	

CON-Line® ST1 KA L / XL

Camera shelf available as an option

- can be used with media furniture CON Line ST1
- various hole patterns to fix a camera
- height adjustable via oblong hole
- retaining straps
- maximum load: 10 kg



Item no.:	Item name	recommended screen size	Colour
2108	CON-Line ST1-KA L	55 - 75" 140 - 191 cm	
2114	CON-Line ST1-KA XL	75 - 84" 191 - 213 cm	

MeetUp Display Adapter

Product specific adapter

- suitable with Logitech Meetup Video conference cameras
- height adjustable (tool needed)
- can be adjusted exactly to the required height via oblong hole
- can be mounted above and beneath the screen



Item no.:		recommended screen size	VESA (max.)	Colour
2278	MeetUp Display Adapter 55 - 75"	55 - 75" 140 - 191 cm	800 mm	
2279	MeetUp Display Adapter 75 - 86"	75 - 86" 191 - 218 cm	800 mm	

Poly Display Adapter

Product specific adapter

- suitable with Poly Studio and Poly Studio X50
- height adjustable (tool needed)
- can be adjusted exactly to the required height via oblong hole
- can be mounted above and beneath the screen



		recommended screen size	VESA (max.)	Colour
2286	Poly Display Adapter 55 - 75"	55 - 75" 140 - 191 cm	800 mm	
2287	Poly Display Adapter 75 - 86"	75 - 86" 191 - 218 cm	800 mm	

Lift Pro Light Black & White

Height adjustable lift system series for XXL screens

- electro-motorized height adjustment
- 978 mm travel way
- cable management with an energy chain
- wired remote control
- the start and end point is programmable
- collision prevention lift stops when there is resistance
- available in 3 versions and 2 colours
- option: bluetooth adapter to control the lift via app (Item no.: 8904)
- option: height adjustable camera holder
 Lift Pro Light Camera Holder Black (Item no.: 8902)
 Lift Pro Light Camera Holder White (Item no.: 8903)















Item no.:	Item name	recommended screen size	VESA	adjustable height (centre of screen)	Load (max.)	Colour
7809	Floorstand Lift Pro Light Black	55 - 86" 140 - 218 cm	max. 800 x 600 mm	min. 836 - max. 1818 mm	120 kg	
7810	Floorstand Lift Pro Light White	55 - 86" 140 - 218 cm	max. 800 x 600 mm	min. 836 - max. 1818 mm	120 kg	
7696	Mobile Lift Pro Light Black	55 - 86" 140 - 218 cm	max. 800 x 600 mm	min. 950 - max. 1928 mm	120 kg	
7697	Mobile Lift Pro Light White	55 - 86" 140 - 218 cm	max. 800 x 600 mm	min. 950 - max. 1928 mm	120 kg	
7791	Wall Lift Pro Light Black	55 - 86" 140 - 218 cm	max. 800 x 600 mm	min. 832 - max. 1810 mm	120 kg	
7801	Wall Lift Pro Light White	55 - 86" 140 - 218 cm	max. 800 x 600 mm	min. 832 - max. 1810 mm	120 kg	

Lift Pro Light Dual

Height adjustable lift system series for 2 screens

- VESA universal holder for 2 screens "side-by-side"
- electro-motorized height adjustment
- 978 mm travel way
- cable management with an energy chain
- wired remote control
- the start and end point is programmable
- collision prevention lift stops when there is resistance
- available in 3 versions
- option: bluetooth adapter to control the lift via app (Item no.: 8904)
- option: height adjustable camera holder Lift Pro Light Camera Holder Black (Item no.: 8902)

















Item no.:	Item name	recommended screen size	VESA	adjustable height (centre of screen)	Load (max.)	Colour
8216	Mobile Lift Pro Light Dual Black	46 - 65" 117 - 165 cm *	max. 800 x 600 mm	min. 950 - max. 1928 mm	120 kg (2x 60 kg)	
8217	Floorstand Lift Pro Light Dual Black	46 - 65" 117 - 165 cm *	max. 800 x 600 mm	min. 836 - max. 1818 mm	120 kg (2x 60 kg)	
8206	Wall Lift Pro Light Dual Black	46 - 65" 117 - 165 cm *	max. 800 x 600 mm	min. 832 - max. 1810 mm	120 kg (2x 60 kg)	

-* only up to max. VESA 400 in width -

Floor stand | motorized


Lift Pro Series

Height adjustable lift systems for XXL screens

- electromotive height adjustment
- wired touch control
- cable management by cable clips on the back
- lots of accessories available as add-ons








Floorbase Lift Pro










Touch Lift Pro additional, electromotive tilt adjustment

Item no.:	Item name	Description	recommended screen size	VESA	Load (max.)	adjustable height (Center of screen)	Colour
7550	Mobile Lift Pro II	lift system, mobile, height adjustable	42 - 100" 107 - 254 cm	max. 800 x 600 mm	135 kg	min. 1120 - max. 1620 mm	
7551	Floorbase Lift Pro	lift system, free standing, height adjustable	42 - 100" 107 - 254 cm	max. 800 x 600 mm	135 kg	min. 1190 - max. 1690 mm	
7552	Wall Lift Pro	lift system, floor-to-wall mounting, height adjustable	42 - 100" 107 - 254 cm	max. 800 x 600 mm	135 kg	min. 1190 - max. 1690 mm	
7558	Touch Lift Pro	lift system, with electrical height / tilt angle adjustment	42 - 86" 107 - 218 cm	max. 800 x 600 mm	135 kg	min. 886 - max. 1386 mm	

Mobile Lift Pro Flip L/P

Mobile, height adjustable lift system with rotatable holder, especially for XXL screens

- rotatable in landscape or portrait format (no tools needed)
- electromotive height adjustment
- height adjustable from 1120 mm min. to 1620 mm max.
- wired remote control
- 4 heavy-duty castors, 2 of them with lock-type brake
- cable management by cable clips on the back

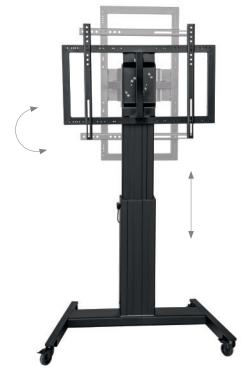





Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
1831	Mobile Lift Pro Flip L/P	42 - 86" 107 - 218 cm	max. 800 x 600 mm	125 kg	

Mobile Lift Pro II 70

Height adjustable lift system

- electromotive height adjustment
- 700 mm travel way
- the start and end point is programmable
- Memory Control Box saves 3 individual travel ways
- collision prevention lift stops when there is resistance







8218	Mobile Lift Pro II 70	42 - 100" 107 - 254 cm	max. 800 x 600 mm	min. 1387 - max. 2087 mm	135 kg	
		recommended screen size		adjustable height (centre of screen)	Load (max.)	Colour

Lift Pro - Whiteboard wings

Optionally available whiteboard wings

- can be used with lift systems from Lift Pro Series (except Touch Lift Pro and Mobile Lift Pro Flip L/P)
- customized on screen size*
- when closed, the entire display is covered
- both wings can be swivelled by 180°
- can be written on with whiteboard markers on both sides
- dry wipeable
- magnetic


Item no.:			Colour
2291	Lift Pro - Whiteboard wings	depending on the screen*	

* Please specify the exact display type or the required size when ordering

Lift Pro - Cisco Webex Board Adapter Optionally available special adapters

can be used with the following lift systems of the Lift Pro series (Item no.: 7550, 7551, 7552, 8218)

special hole pattern for Cisco Webex Board series



Item no.:			Colour
7560	Lift Pro - Cisco Webex Board 55" Adapter	1114 x 645 mm	
7561	Lift Pro - Cisco Webex Board 70" Adapter	1455 x 862 mm	

Lift Pro - Frontshelf | Sideshelf

AV shelf available as an option

- can be used with the following lift systems of the Lift Pro series (Item no.: 7550, 7551, 7552, 1831)
- shelf for AV equipment
- variable in height (tool needed)



Item no.:			Load (max.)	Colour
7553	Lift Pro - Frontshelf	W 428 x D 258 mm	5 kg	
7554	Lift Pro - Sideshelf	W 250 x D 100 mm	5 kg	

Lift Pro - Memory Control

Optional lift control unit

- can be used with lift systems of the Lift Pro series
- the start and end point is programmable
- Memory Control Box saves 3 individual travel ways



2913	Lift Pro - Memory Control

Lift Pro - Camera Holder L / XL

Camera shelf available as an option

- can be used with the following lift systems of the Lift Pro series (Item no.: 7550, 7551, 7552, 8218)
- various hole patterns to fix a camera
- height adjustable
- retaining straps
- maximum load: 10 kg



Item no.:	Item name	recommended screen size	Colour
2103	Lift Pro - Camera Holder L	55 - 75" 140 - 191 cm	
7555	Lift Pro - Camera Holder XL	75 - 84" 191 - 213 cm	

Lift Pro - PC Holder

PC holder available as an option

- can be used with lift systems of the Lift Pro series (except Touch Lift Pro and Mobile Lift Pro Flip L/P)
- holding fixture for a mini PC
- for mounting behind the screen holder





Installation example


Item no.:			Load (max.)	Colour
7556	Lift Pro - PC Holder	W 220 x D 80 mm	5 kg	

Mobile Lift Pro Matrix

höhenverstellbares Liftsystem für eine 2 x 2 - Videowall

- elektro-motorische Höhenverstellung
- 700 mm Fahrweg
- Höhe der Bildschirmreihen über rückseitigen Rahmen einstellbar
- kabelgebundene Tastbedienung
- Feinjustierung der Bildschirme über Einstellschrauben an der VESA-Aufnahme (Höhe, Tiefe, Breite)



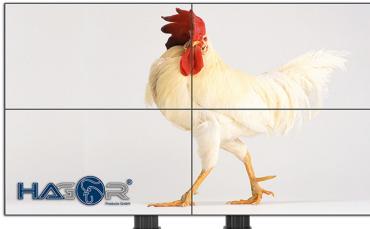









ArtNr.:	Artikelbezeichnung	empfohlene Bildschirmgröße	VESA	max. Traglast	Farbe
2104	Mobile Lift Pro Matrix	46 - 55" 117 - 140 cm	max. 600 x 400 mm	25 kg je Screen	

Floor stand | counterbalanced

HP Counterbalanced Floorstand

Display stand with manual height adjustment

- suitable for screens and whiteboards
- installation in landscape format
- manual height adjustment thanks to adjustable to device weight mechanism
- very smooth adjustability
- continuously height adjustable
- 400 mm travel way
- screen stays safely in desired height
- load adjustable to device weight
- with levelling feet
- available in 2 versions






Item no.:		recommended screen size		Load (max.) (adjustable to device weight)	Colour
8219	HP Counterbalanced Floorstand	46 - 70" 117 - 178 cm	max. 800 x 400 mm	min. 40 - max. 60 kg	
8220	HP Counterbalanced Floorstand HD	70 - 90" 178 - 229 cm	max. 800 x 600 mm	min. 60 - max. 90 kg	

HP Counterbalanced Mobile

Display cart with manual height adjustment

- suitable for screens and whiteboards
- installation in landscape format
- manual height adjustment thanks to adjustable to device weight mechanism
- very smooth adjustability
- continuously height adjustable
- 400 mm travel way
- screen stays safe in desired height
- load adjustable to device weight
- lock-type smooth-running castors
- available in 2 versions



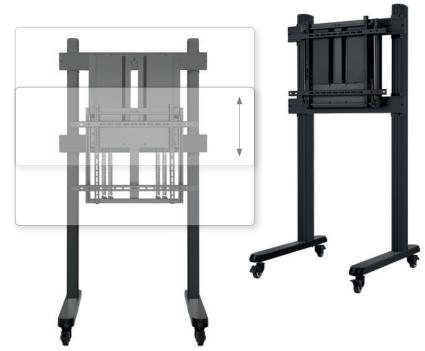

Item no.:	Item name	recommended screen size	VESA	Load (max.) (adjustable to device weight)	Colour
8221	HP Counterbalanced Mobile	46 - 70" 117 - 178 cm	max. 800 x 400 mm	min. 40 - max. 60 kg	
8222	HP Counterbalanced Mobile HD	70 - 90" 178 - 229 cm	max. 800 x 600 mm	min. 60 - max. 90 kg	

HP Counterbalanced Floor-Wall

Display stand with manual height adjustment

- suitable for screens and whiteboards
- installation in landscape format
- manual height adjustment thanks to adjustable to device weight mechanism
- very smooth adjustability
- continuously height adjustable
- 400 mm travel way
- screen stays safe in desired height
- load adjustable to device weight
- loor-to-wall installation
- available in 2 versions





Item no.:		recommended screen size		Load (max.) (adjustable to device weight)	Colour
8223	HP Counterbalanced Floor-Wall	46 - 70" 117 - 178 cm	max. 800 x 400 mm	min. 40 - max. 60 kg	
8224	HP Counterbalanced Floor-Wall HD	70 - 90" 178 - 229 cm	max. 800 x 600 mm	min. 60 - max. 90 kg	



Info Tower Series

Display cart

- screen height selectable in detents in 50-mm steps (tool needed)
- internal cable routeing
- invisibly mounted set of castors
- removable tower cover
- installation in portrait or landscape format possible (depending on screen)



Item no.:	Item name	recommended screen size	VESA	Load (max.)	Foot print	Height	Colour
1522	Info Tower Single	32 - 55" 81 - 140 cm	max. 400 x 400 mm	80 kg	W 700 x D 500 mm	900 - 1200 mm	1
1566	Info Tower Single L	46 - 84" 116 - 213 cm	max. 800 x 600 mm	100 kg	W 1000 x D 700 mm	450 - 1830 mm	1
1523	Info Tower Dual	2x 40 - 55" 102 - 140 cm	max. 600 x 400 mm	2x 35 kg	W 1000 x D 700 mm	900 - 1200 mm	1
1572	Info Tower Dual L	2x 40 - 55" 102 - 140 cm	max. 600 x 400 mm	2x 35 kg	W 1000 x D 700 mm	450 - 1830 mm	1
1822	Info Tower Dual XL	2x 55 - 65" 140 - 165 cm	max. 600 x 400 mm	2x 40 kg	W 1000 x D 700 mm	450 - 1830 mm	1

Info Tower Series "Black Edition"

Display cart

- screen height selectable in detents in 50-mm steps (tool needed)
- internal cable routeing
- invisibly mounted set of castors
- removable tower cover
- installation in portrait or landscape format possible (depending on screen)









Item no.:	Item name	recommended screen size	VESA	Load (max.)	Foot print	Height	Colour
2331	Info Tower Single B	32 - 55" 81 - 140 cm	max. 400 x 400 mm	80 kg	W 700 x T 500 mm	900 - 1200 mm	/
2332	Info Tower Single LB	46 - 84" 116 - 213 cm	max. 800 x 600 mm	100 kg	W 1000 x T 700 mm	450 - 1830 mm	/
2334	Info Tower Dual B	2x 40 - 55" 102 - 140 cm	max. 600 x 400 mm	2x 35 kg	W 1000 x T 700 mm	900 - 1200 mm	/
2335	Info Tower Dual LB	2x 40 - 55" 102 - 140 cm	max. 600 x 400 mm	2x 35 kg	W 1000 x T 700 mm	450 - 1830 mm	/
2336	Info Tower Dual XLB	2x 55 - 65" 140 - 165 cm	max. 600 x 400 mm	2x 40 kg	W 1000 x T 700 mm	450 - 1830 mm	/

Info Tower CL

Display cart

- screen height selectable in detents in 50-mm steps (tool needed)
- internal cable routeing
- invisibly mounted set of castors
- removable tower cover
- incl. lockable cabinet
- installation in portrait or landscape format possible



		recommended screen size		Load (max.)	Foot print		Colour
1578	Info Tower CL	32 - 65" 81 - 165 cm	max. 800 x 600 mm	60 kg	W 1000 x T 700 mm	450 - 1830 mm	1
2337	Info Tower CLB	32 - 65" 81 - 165 cm	max. 800 x 600 mm	60 kg	W 1000 x T 700 mm	450 - 1830 mm	1

Info Tower Wall

Display stand for floor-to-wall installation

- screen height selectable in detents in 50-mm steps (tool needed)
- internal cable routeing
- removable tower cover
- installation in portrait or landscape format possible
- incl. wall mounting adapter







Item no.:		recommended screen size		Load (max.)	Foot print		Colour
1801	Info Tower Wall	46 - 84" 116 - 213 cm	max. 800 x 600 mm	80 kg	W 317 x T 213 mm	450 - 1830 mm	

Info Tower Single L - HD

Display cart, heavy-duty

- screen height selectable in detents in 50-mm steps (tool needed)
- internal cable routeing
- invisibly mounted set of castors
- removable tower cover
- installation in portrait or landscape format possible









Item no.:	Item name	recommended screen size	VESA	Load (max.)	Foot print	Height (centre of screen)	Colour
2330	Info Tower Single L - HD	85 - 98" 216 - 249 cm	max. 900 x 600 mm	125 kg	W 1000 x T 700 mm	450 - 1600 mm	1
2333	Info Tower Single LW - HD	85 - 98" 216 - 249 cm	max. 900 x 600 mm	125 kg	W 1000 x T 700 mm	450 - 1600 mm	/

Info Tower Mediabox

Media box available as an option

- can be used with stand systems of the Info Tower series (as from L)
- height adjustable (tool needed)
- incl. magnetic lock



Item no.:			Load (max.)	Colour
1795	Info Tower Mediabox	external: W 565 x H 190 x D 290 mm internal: W 525 x H 155 x D 250 mm	7,5 kg	1

Info Tower / Elia SW Glass Shelf

Glass shelf available as an option

- can be used with stand systems of the Info Tower Series (as from L) and of the Elia SB series
- height adjustable (tool needed)



Item no.:			Load (max.)	Colour
2406	Info Tower / Elia SW Glass Shelf	W 500 x D 300 mm	15 kg	

HA Cam Holder

Camera shelf available as an option

- can be used with stand systems of the Info Tower series
- horizontal distance adjustable to the given VESA standard (400 | 600 | 800)
- with universal oblong hole to fix the camera in position
- continuously height adjustable (tool needed)
- can be mounted above and beneath the screen





Item no.:		recommended screen size		Load (max.)	Colour
2909	HA Cam Holder	up to 75" 165 cm	W 850 x T 138,5 mm	10 kg	

Info Tower Codec Shelf Series

Codec shelf available as an option

- can be used with stand systems of the Info Tower series
- holder for common codecs or mini PCs



Item no.:			Load (max.)	Colour
1524	Info Tower Codec Shelf	W 320 x H 200 x D 35 mm	2,5 kg	
1624	Info Tower Codec Shelf L	W 320 x H 300 x D 130 mm	2,5 kg	

Info Tower WH Series

Tiltable TV holder available as an option

 can be used with stand systems of the Info Tower series





Item no.:		recommended screen size	VESA	Load (max.)	Colour
1792	WH 50 T - HD	32 - 55" 81 - 140 cm	max. 400 x 600 mm	125 kg	
1793	WH 85 T - HD	55 - 110" 140 - 280 cm	max. 800 x 600 mm	125 kg	

Info Tower Mounting Adapter with Plugbar

Mounting adapter available as an option

- can be used with standard systems of the Info Tower series
- can be hooked in on the rear side of the Info Tower pillar
- height adjustable (tool needed)
- incl. 4-fold plugbar with safety switch
- plugbar with 180 cm supply cable



Item no.:			Colour
1821	Info Tower Mounting Adapter with Plugbar	W 270 x D 150 mm	

HP Twin Stand

Display cart / Display stand

- installation in portrait or landscape format possible (depending on screen)
- height adjustable 1200 min. to 1500 mm max.
- height adjustable via detents (spring bolts) along the column
- floor space required: W 850 x D 600 mm
- cable management inside the telescopic tubes
- height adjustbale shelf
- height adjustable camera holder



Item no.:		recommended screen size		Load (max.)	Colour
8209	HP Twin Stand	32 - 55" 81 - 140 cm	max. 600 x 400 mm	45 kg	

HP Twin Stand HD

Display cart / Display stand

- installation in portrait or landscape format possible (depending on screen)
- height adjustable 1350 min. to 1650 mm max.
- height adjustable via detents (spring bolts) along the column
- floor space required: W 1000 x D 680 mm
- cable management inside the telescopic tubes
- height adjustbale shelf
- height adjustable camera holder





Item no.:		recommended screen size		Load (max.)	Colour
8210	HP Twin Stand HD	55 - 84" 140 - 213 cm	max. 800 x 500 mm	90 kg	

BrackIT® Stand Single

Display cart

- installation in landscape or portrait format possible
- the screen can be rotated by 90° (tool needed)
- VESA holder -5 / +12° tiltable
- height adjustable between min. 1250 to max. 1600 mm (approximately centre of screen)
- height adjustable camera holder
- shelf for AV equipment
- handle on the rear simplifies the mobility
- internal cable routeing







Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
8207	BrackIT Stand Single	42 - 65" 106 - 165 cm	max. 600 x 400 mm	70 kg	

BrackIT® Stand HD XXL

Display cart

- installation in landscape or portrait format possible
- VESA holder -5 / +10° tiltable
- height adjustable between min. 1250 to max. 1600 mm (approximately centre of screen)
- floor space required: W 1250 x D 760 mm
- castors with lock-type brake
- height adjustable camera holder
- shelf for AV equipment
- handle on the rear simplifies the mobility
- internal cable routeing





Item no.:		recommended screen size		Load (max.)	Colour
8208	BrackIT Stand HD XXL	65 - 120" 165 - 305 cm	max. 1000 x 600 mm	140 kg	

BrackIT® Rotate

Display cart with lock free rotating mechanism

- freely rotatable by 90°
- locks in the respective end position
- can only be used with a centered hole pattern
- landscape to portrait format and vice versa
- little effort needed thanks to spring mechanism
- release from end position without locking
- tilting possible with tools (0° / -2,5° / -5°)
- internal cable routeing
- set of castors, 2 lock-type castors
- including optionally usable shelf, selectively mountable in 2 positions





Item no.:		recommended screen size		Load (max.)	Foot print		Colour
8400	BrackIT Rotate	43 - 65" 109 - 165 cm	200 x 200 300 x 300 400 x 400 mm	45 kg	W 1019 x T 770 mm	1738 mm	

BrackIT® Stand low tilt

Display cart

- installation in landscape format
- screen continuously tiltable with tools from 0 to 90° by means of a rotary handle on the side
- TV holding fixture lockable on request
- castors with lock-type brake
- incl. cable clips on the rear side for a clean appearance
- 493 mm height (centre of screen), when using a screen with a centered hole pattern
- optional adapter plates are available to compensate decentralized VESA hole patterns for example for the Samsung QB-, QH-, QM-series

32 - 43" (Item no.: 2289) | 49 - 65" (Item no.: 2280)











^{- *} The stated height only applies if the hole pattern is centered. | Compensating adapter plates are required for decentralized VESA hole patterns. | See page 91. -

BrackIT® Stand Dual

Display cart

- for 2 screens "side-by-side"
- TV holding fixture height adjustable along the column
- TV holding fixture 0 to 15° tiltable
- dimensions (incl. VESA rail): H 2100 x W 1700 x D 1000 mm
- cable management by cable clips along the column and aluminium rails
- mobile, thanks to a castor set with lock-type brake







Item no.:		recommended screen size		Load (max.)	Colour
8226	BrackIT Stand Dual	42 - 55" 107 - 140 cm	max. 600 x 400 mm	2x 35 kg	

BrackIT® Stand Dual XL

Display cart

- for 2 screens "side-by-side"
- TV holding fixture height adjustable along the column
- TV holding fixture 0 to 15° tiltable
- dimensions (incl. VESA rail): H 2100 x W 2000 x D 1000 mm
- cable management by cable clips along the column and aluminium rails
- mobile, thanks to a castor set with lock-type brake







		recommended screen size	VESA	Load (max.)	Colour
8227	BrackIT Stand Dual XL	55 - 75" 140 - 191 cm	max. 800 x 600 mm	2x 45 kg	

Floor stand

Braclabs® Stand Series

Display cart / Display stand

- quick and easy assembly
- VESA mounting fixture for use in either landscape or portrait format
- VESA mounting fixture can be swivelled by $\pm 20^{\circ}$
- easy hanging in and out of the screen via keyholes
- locking of column height by pin screw on the back
- internal cable management
- incl. handle on the back for easy adjustment of the column
- incl. cable feedthrough







portrait or landscape



BracLabs Stand Frontshelf



Item no.:	Item name	recommended screen size	VESA	Load (max.)	Height (centre of screen)	Colour
1981	Braclabs Stand Floorbase	32 - 55" 81 - 140 cm	max. 600 x 400 mm	35 kg	1195 - 1635 mm	
1982	Braclabs Stand Floormount	32 - 55" 81 - 140 cm	max. 600 x 400 mm	35 kg	1195 - 1635 mm	
1983	Braclabs Stand Mobile	32 - 55" 81 - 140 cm	max. 600 x 400 mm	35 kg	1275 - 1715 mm	
2073	Braclabs Stand Wall	32 - 55" 81 - 140 cm	max. 600 x 400 mm	35 kg	1400 - 1635 mm	
Item no.:			Size		Load (max.)	
1984	Braclabs Stand Frontshelf	W 450 x T 2	60 mm	7,5 kg		

Braclabs® Stand Floorbase HD

Display stand, heavy-duty

- installation in landscape or portrait format possible
- locking of column height by pin screw on the back
- stable handles on the back for an easy adjustment of the column
- internal cable routeing
- height adjustable camera holder (tools needed)
- height adjustable AV shelf (tools needed)
- PC shelf on the back (retractable)
- incl. cable feedthrough







Item no.:		recommended screen size			Foot print		Colour
8213	Braclabs Stand Floorbase HD	65 - 100" 165 - 254 cm	max. 1000 x 600 mm	100 kg	W 900 x D 500 mm	1195 - 1635 mm	

Elia SB Series

Display stand, heavy-duty

- installation in landscape format
- incl. VESA universal holding fixture
- screen height selectable in detents in 50-mm steps (tool needed)
- concealed cable routeing inside the column
- removable tower cover
- option: 6-piece castor set, 50 mm (Item no.: 2407)
- option: Elia SB Glass Shelf (Item no.: 2406)












Item no.:	Item name	Description	recommended screen size	VESA	Load (max.)	Foot print	Colour
4873	Elia SB	Heavy-duty stand system	up to 86" 218 cm	max. 800 x 600 mm	125 kg	W 900 x D 600 mm	
4876	Elia SW Back-to-Back	Heavy-duty stand system for two screens B2B	2x 75" 191 cm	max. 800 x 600 mm	125 kg	W 900 x D 600 mm	
4872	Elia SW HD Touch	Heavy-duty stand system for touch applications	up to 86" 218 cm	max. 800 x 600 mm	125 kg	W 900 x D 600 mm	

HP Stand 55

Display cart

- TV holding fixture ± 90° rotatable
- TV holding fixture tiltable from -5 to +15°
- switch between landscape and portrait format without disassembling the screen (tool needed)
- internal cable routeing
- incl. set of castors with lock-type brake
- screen height adjustable (tool needed)
- incl. glass shelf, W 455 x D 325 mm





switch between landscape and portrait format



tilt adjustable from -5 to +15°



telescopic tubi





Item no.:	Item name	recommended screen size	VESA	Load (max.)	Foot print	Height	Colour
9425	HP Stand 55	37 - 65" 94 - 165 cm	max. 800 x 500 mm	40 kg	W 1000 x D 500 mm	1160 - 1800 mm	

HP Stand 55 Glass shelf

Glass shelf available as an option

- can be used with HP Stand 55
- continuously height adjustable (tool needed)
- several glass shelves can be mounted one above the other





Item no.:			Load (max.)
1926	HP Stand 55 Glass shelf	W 455 x D 325 mm	15 kg

Elia Studio Shine Series

Display stand

- unique "easel design"
- with LED ambient lighting
- versatile programmable lighting mood
- height compensation (tool needed)
- safety wire rope
- cable management by cable clips
- available in 2 high quality designs







Item no.:	Item name	recommended screen size		Load (max.)	Colour
8228	Elia Studio Shine Grey	40 - 70" 102 - 178 cm	max. 600 x 400 mm	40 kg	
8229	Elia Studio Shine Wood	40 - 70" 102 - 178 cm	max. 600 x 400 mm	40 kg	

Elia Stainless Steel Series

Display stand

- TV holding fixture ± 180° rotatable (tool needed)
- with lateral turn limiter ± 30°
- internal cable routeing
- base plate: Ø 530 mm
- screen height adjustable (tool needed)
- incl. height adjustable AV shelf (tool needed)









		recommended screen size		Load (max.)	Height (centre of screen)	Colour
4849	Elia 115 Stainless Steel	32 - 55" 81 - 140 cm	max. 400 x 400 mm	35 kg	min. 700 - max. 1000 mm	
4877	Elia 160 Stainless Steel	32 - 55" 81 - 140 cm	max. 400 x 400 mm	35 kg	min. 700 - max. 1700 mm	

BL Fixed 100

Wall mount, fixed

- screen can be installed in portrait or landscape format
- slide-in system from above for secure fit
- incl. hang out protection
- distance to wall: 14 mm



Item no.:		recommended screen size	VESA (max.)	Load (max.)	Colour
8411	BL Fixed 100	15 - 24" 38 - 61 cm	100 x 100 mm	25 kg	

BL Fixed 200

Wall mount, fixed

- screen can be installed in portrait or landscape format
- slide-in system from above for secure fit
- incl. hang out protection
- distance to wall: 19 mm




Item no.:	Item name	recommended screen size	VESA (max.)	Load (max.)	Colour
8412	BL Fixed 200	15 - 32" 38 - 81 cm	200 x 200 mm	30 kg	

BL Fixed 400 | 800

Wall mounts, fixed

- screen can be installed in portrait or landscape format
- incl. quick release device via rope-drawn spring-loaded latch, with magnets for invisible fixing on the wall mount
- integrated spirit level
- distance to wall: 22 mm



Item no.:		recommended screen size		Load (max.)	Colour
8413	BL Fixed 400	32 - 46" 81 - 116 cm	max. 400 x 400 mm	40 kg	
8414	BL Fixed 800	46 - 65" 116 - 165 cm	max. 800 x 600 mm	60 kg	

BL Superslim 400 | 600

Wall mounts, fixed

- exact fine adjustment of height by means of screws (± 8 mm)
- incl. detachable spirit level
- VESA adapter can be randomly positioned on the wall plate
- incl. quick release device via rope-drawn spring-loaded latch, with magnets for invisible fixing on the wall mount
- distance to wall: 18 mm







Item no.:		recommended screen size		Load (max.)	Colour
8402	BL Superslim 400	32 - 55" 81 - 140 cm	max. 400 x 400 mm	35 kg	
8403	BL Superslim 600	55 - 75" 140 - 191 cm	max. 600 x 400 mm	35 kg	

WH 50 F - HD

Fixed wall mount (heavy duty)

- especially for portrait installation
- distance to wall: 32 mm
- integrated spirit level
- screen position can be hoizontally adjusted after assembly thanks to oblong mounting holes
- incl. height compensation up to 10 mm
- incl. optionally usable lock









Item no.:		recommended screen size			Colour
1790	WH 50 F - HD	32 - 75" 81 - 191 cm	max. 400 x 600 mm	125 kg	
1469	VESA Adapter Stripes 800	-	max. 800 mm	125 kg	

WH 85 F - HD

Fixed wall mount (heavy duty)

- portrait or landscape installation possible
- distance to wall: 32 mm
- integrated spirit level
- screen position can be horizontally adjusted after assembly thanks to oblong mounting holes
- incl. height compensation up to 10 mm
- incl. optionally usable lock







Item no.:		recommended screen size			Colour
1791	WH 85 F - HD	55 - 110" 140 - 279 cm	max. 800 x 600 mm	125 kg	

BL Tilt 200

Wall mount, tiltable

- screen can be installed in portrait or landscape format
- distance to wall: 28 mm
- 0 to 12° tiltable (tool needed)
- easy assembly






Item no.:	Item name	recommended screen size		Load (max.)	Colour
8401	BL Tilt 200	32 - 42" 81 - 107 cm	max. 200 x 200 mm	30 kg	

BL Tilt 400 | 800

Wall mounts, tiltable

- screen can be installed in portrait or landscape format
- 0 to 12° continuously tiltable
- incl. hang out protection
- incl. quick release device via rope-drawn springloaded latch, with magnets for invisible fixing on the wall mount
- integrated spirit level
- distance to wall: 35 mm

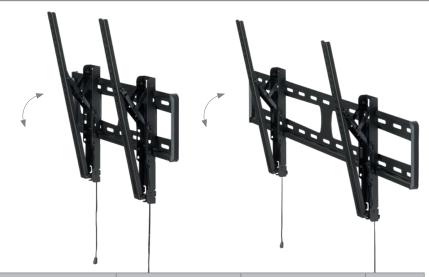

Item no.:		recommended screen size		Load (max.)	Colour
8415	BL Tilt 400	32 - 49" 81 - 124 cm	max. 400 x 400 mm	40 kg	
8416	BL Tilt 800	46 - 65" 116 - 165 cm	max. 800 x 600 mm	60 kg	

BL Superslim Tilt 400 | 600

Wall mounts, tiltable

- exact fine adjustment of height by means of screws (± 8 mm)
- incl. detachable spirit level
- VESA adapter can be randomly positioned on the wall plate
- tiltable from 0 to 12°
- incl. quick release device via rope-drawn springloaded latch, with magnets for invisible fixing on the wall mount
- distance to wall: 30 mm





Item no.:		recommended screen size		Load (max.)	Colour
8404	BL Superslim Tilt 400 32 - 55" 81 - 140 cm		max. 400 x 400 mm	35 kg	
8405	BL Superslim Tilt 600	55 - 75" 140 - 191 cm	max. 600 x 400 mm	35 kg	

WH 50 T - HD

Tiltable wall mount (heavy duty)

- especially for portrait installation
- distance to wall: 65 mm
- ± 10° continuously tiltable
- detachable spirit level
- screen position can be horizontally adjusted after assembly thanks to oblong mounting holes
- incl. height compensation up to 10 mm
- incl. optionally usable lock







Colour

Item no.:	Item name recommended screen size		VESA		Colour
1792	WH 50 T - HD 32 - 75" 81 - 191 cm		max. 400 x 600 mm	125 kg	
1469	VESA Adapter Stripes 800	-	max. 800 mm	125 kg	

WH 85 T - HD

Tiltable wall mount (heavy duty)

- distance to wall: 65 mm
- ± 10° continuously tiltable
- detachable spirit level
- screen position can be horizontally adjusted after assembly thanks to oblong mounting holes
- incl. height compensation up to 10 mm
- incl. optionally usable lock







1793	WH 85 T - HD 55 - 110" 140 - 279 cm		max. 800 x 600 mm	125 kg	
		Item name recommended screen size			Colour

WH 120 T - HD

Tiltable wall mount (heavy duty)

- screen can be installed in landscape format
- distance to wall: 90 mm
- ± 10° continuously tiltable
- incl. height compensation up to 10 mm
- screen position can be hoizontally adjusted after assembly thanks to oblong mounting holes
- incl. optionally usable lock









Item no.:		recommended screen size	VESA		Colour
8406	406 WH 120 T - HD 75 - 130" 191 - 330 cm		max. 1200 x 900 mm	125 kg	

BrackIT® L

Full motion wall mount

- screen can be installed in landscape or portrait format
- no tools needed to set tilt angle, can be locked by means of a rotary handle on the side
- incl. cable clips for decent cable management
- distance to wall: 63 min. to 703 mm max.
- -2 to +12° continuously tiltable
- \pm 90° swivelling, depending on screen size
- ± 5° subsequent levelling







Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
1985	BrackIT L	32 - 55" 81 - 140 cm	max. 600 x 400 mm	30 kg	

BrackIT® L HD

Full motion wall mount

- screen can be installed in landscape or portrait format
- no tools needed to set tilt angle, can be locked by means of a rotary handle on the side
- incl. cable clips for decent cable management
- distance to wall: 60 min. to 500 mm max,
- -2 to +12° continuously tiltable
- ± 45° swivelling, depending on screen size
- ± 5° subsequent levelling







Item no.:		recommended screen size		Load (max.)	Colour
1986	BrackIT L HD	32 - 55" 81 - 140 cm	max. 600 x 400 mm	40 kg	

BrackIT® XL HD

Full motion wall mount

- screen installation in landscape or portrait format
- no tools needed to set tilt angle, can be locked by means of a rotary handle on the side
- incl. cable clips for decent cable management
- distance to wall: 60 min. to 500 mm max.
- -2 to +12° continuously tiltable
- 45° swivelling, depending on screen size
- ±5° subsequent levelling









Item no.:		recommended screen size		Load (max.)	Colour
1987	BrackIT XL HD	55 - 75" 140 - 191 cm	max. 800 x 600 mm	80 kg	

BrackIT® XXL HD


Full motion wall mount

- screen installation in landscape or portrait format
- no tools needed to set tilt angle, can be locked by means of a rotary handle on the side
- incl. cable clips for decent cable management
- distance to wall: 68 min. to 508 mm max.
- -2 to +12° continuously tiltable
- 45° swivelling, depending on screen size
- ±5° subsequent levelling









BL Full Motion 200 Series

Full motion wall mount

- screen installation in landscape or portrait format
- variable distance to wall
- integrated spirit level
- incl. cable clips for decent cable management
- -5 to +10° tiltable







Item no.:	Item name	recommended screen size	VESA	Load (max.)	Wall distance	Swivelling range	Colour
8417	BL Full Motion 200 - I	15 - 32" 38 - 81 cm	max. 200 x 200 mm	25 kg	48 mm	± 15°	
8418	BL Full Motion 200 - II	15 - 32" 38 - 81 cm	max. 200 x 200 mm	25 kg	50 - 225 mm	± 45°	
8419	BL Full Motion 200 - III	15 - 32" 38 - 81 cm	max. 200 x 200 mm	25 kg	52 - 342 mm	± 90°	

WH Synchron 41

Full motion wall mount

- screen installation in landscape or portrait format
- variable distance to wall possible, continuously extractable from 45 min. to 484 mm max.
- ± 90° max. continuous swivelling range
- no tools needed to set tilt angle $-2 / +12^{\circ}$
- incl. cable clips for decent cable management





Item no.:	m no.: Item name recommended screen size		VESA	Load (max.)	Colour
2061-1	2061-1 WH Synchron 41 32 - 50" 81 - 1:		max. 400 x 400 mm	30 kg	

WH Synchron 51

Full motion wall mount

- screen installation in landscape or portrait format
- variable distance to wall possible, continuously extractable from 50 min. to 465 mm max.
- \pm 45° max. continuous swivelling range
- no tools needed to set tilt angle -2 / +12°
- incl. cable clips for decent cable management





Item no.:		recommended screen size		Load (max.)	Colour
2062	WH Synchron 51	40 - 65" 102 - 165 cm	max. 600 x 400 mm	45 kg	

WH Turn M

Rotatable universal wall mount

- freely rotatable by 90° locks in final position
- can only be used with a centered VESA hole pattern
- clicks in place in the respective final position (0 or 90°)
- little effort needed thanks to spring mechanism
- tilting possible (0° / -2,5° / -5°)
- continuous change of screen format with no tools needed
- distance to wall: 67 mm





Item no.:		recommended screen size		Load (max.)	Colour
5760	WH Turn M	46 - 55" 117 - 140 cm	200 x 200 300 x 300 400 x 400 mm	45 kg	

WH Turn L Rotatable universal wall mount - freely rotatable by 90° - locks in final position - can only be used with a centered VESA hole pattern - continuous change of screen format with no tools needed - little effort needed thanks to spring mechanism - distance to wall: 74,5 mm

max. 600 x 400 mm

65 kg


55 - 75" | 140 - 191 cm

WH Turn L

WH 75 FPC

Fixed wall mount with PC compartment

- installation in landscape or portrait format (depending on screen size)
- incl. innovative pull-out mechanism, e.g. for mini PC
- access to e. g. mini PC guaranteed, even during running operation
- incl. locking function for mini PC (adjustable to size)
- incl. lock for the pull-out mechanism for protection against unauthorized access

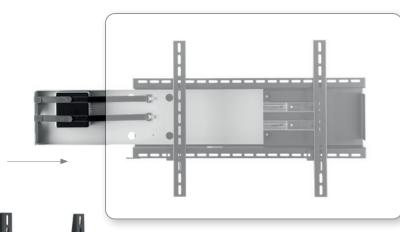





		recommended screen size	VESA	Load (max.)	Wall distance	Colour
2220	WH 75 FPC	40 - 65" 102 - 165 cm	max. 600 x 400 mm	80 kg	92,5 mm	

⁻ Available for other screen sizes on request. -

WH Moto 80 | 160

Electrical wall mounts with height adjustment

- installation in landscape format
- electromotive, continuous height adjustment
- 500 mm travel way
- incl. wired touch control
- dimensions:
 H 1005 x W 1148 x D 127 mm









Item no.:		recommended screen size		Load (max.)	Colour
8407	WH Moto 80	84 - 110" 213 - 279 cm	max. 900 x 800 mm	80 kg	
8408	WH Moto 160	84 - 110° 213 - 279 cm	max. 900 x 800 mm	160 kg	

HP Counterbalanced Wall

Wall mount with manual height adjustment

- suitable for screens or touchscreens
- installation in landscape format
- manual height adjustment thanks to adjustable to device weight mechanism
- continuous height adjustable blackboard principle
- very smooth adjustability
- 400 mm travel way
- only 125 mm distance to wall
- screen stays safely in desired height












Item no.:		recommended screen size		Load (max.)	Colour
8409	HP Counterbalanced Wall	55" - 75" 140 - 191 cm	max. 800 x 400 mm	min. 40 - max. 60 kg, adjustable to device weight	

HP Counterbalanced Wall HD

Wall mount with manual height adjustment

- suitable for screens or touchscreens
- installation in landscape format
- manual height adjustment thanks to adjustable to device weight mechanism
- continuous height adjustable blackboard principle
- very smooth adjustability
- 400 mm travel way
- only 127 mm distance to wall
- screen stays safely in desired height

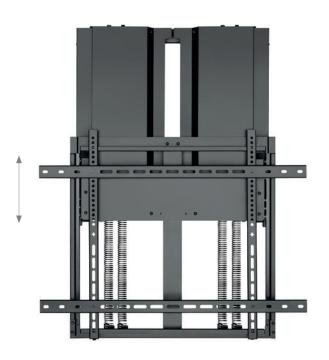









Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
8410	HP Counterbalanced Wall HD	65" - 90" 165 - 229 cm	max. 800 x 600 mm	min. 60 - max. 90 kg, adjustable to device weight	

Mounting Systems | display specific

WH SA Flip

Rotatable and tiltable wall mount display specific for Samsung WM55H/R


- developed for Samsung WM55H/R (Flip)
- freely rotatable by 90°
- stays securely in the respective final position
- final position release with little effort thanks to spring mechanism
- tilting possible $(0^{\circ} / -2.5^{\circ} / -5^{\circ})$
- continuous change of screen position with no tools needed
- distance to wall: 67 mm





incl. Flip Adapter 65"

Samsung WM65R



mmended screen size	VESA	Load (max.)	Colour
Samsung WM55H/R	400 x 400 mm	45 kg	

45 kg

SAMSUNG

400 x 400 mm

- Colour similar to SAMSUNG Flip series -

ST SA Flip II

5690

5761

Mobile stand system display specific for Samsung Flip

WH SA Flip

Flip-Adapter 65"

- freely rotatable by -90°
- landscape to portrait format and vice versa
- little effort needed thanks to spring mechanism
- locks in final position
- release from end position without locking
- tilting possible with tools (0° / -2,5° / -5°)
- internal cable routeing
- set of castors, 2 lock-type castors
- including optionally usable shelf



Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
5787	ST SA Flip II 55"	Samsung WM55H Samsung WM55R	400 x 400 mm	45 kg	
5788	ST SA Flip II 65"	Samsung WM65R	400 x 400 mm	45 kg	

- Colour similar to SAMSUNG Flip series -

Mobile Lift Pro Light III Flip

Mobile lift system, display specific for Samsung Flip

- electromotive height adjustment
- operation via wired remote control
- collision prevention lift stops when there is resistance
- landscape to portrait format and vice versa
- freely rotatable by -90°
- little effort needed thanks to spring mechanism
- locks in final position
- release from end position without locking
- tilting possible with tools (0° / -2,5° / -5°)
- incl. lockable media cabinet
- cable management via cable drag chain
- castors with lock-type brake
- option: bluetooth adapter to control the lift via app (Item no.: 8904)





Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
8214	Mobile Lift Pro Light III Flip	Samsung WM55H Samsung WM55R	400 x 400 mm	45 kg	
5761	Flip Adapter 65"	Samsung WM65R	400 x 400 mm	45 kg	

Wall Lift Pro Light III Flip SAMSUNG Floor-to-wall lift system, display specific for Samsung Flip - electromotive height adjustment operation via wired remote control collision prevention - lift stops when there is resistance - landscape to portrait format and vice versa - freely rotatable by -90° - little effort needed thanks to spring mechanism - locks in final position - release from end position without locking - tilting possible with tools (0° / -2,5° / -5°) - incl. lockable media cabinet cable management via cable drag chain - floor-to-wall assembly option: bluetooth adapter to control the lift via app (Item no.: 8904)

400 x 400 mm

400 x 400 mm

Samsung WM55H | Samsung WM55R

Samsung WM65R

Wall Lift Pro Light III Flip

Flip Adapter 65°

8215

5761

45 kg

ScreenOut® OHF Series

Outdoor Totem for Samsung OHF series

- stainless steel outdoor totem (powder-coated)
- portrait installation
- with corrosion-resistant plastic powder coating, highly weather resistant
- concealed cable routeing with power supply inside the totem
- incl. connecting terminals for potential equalisation
- matching screen mount for Samsung OHF displays
- quick removal of top cover and trim panels thanks to central lock
- air inlets and outlets specifically adapted to the display size
- ambient temperature range from -30°C to +50°C
- designed according to Samsung guidelines for OHF-series









SAMSUNG

Item no.:		recommended screen size		Colour
1630	ScreenOut OH46F	Samsung OH46F	H 1889 x W 736 x D 206 mm	
1631	ScreenOut OH55F	Samsung OH55A OH55F	H 2081 x W 844 x D 206 mm	
2501	ScreenOut OH85F	Samsung OH85F	H 2820 x W 1300 x D 285 mm	

ScreenOut® XE4F-M Series

Outdoor totem for LG XE4F-M series

- stainless steel outdoor totem (powder-coated)
- portrait installation
- with corrosion-resistant plastic powder coating, highly weather resistant
- concealed cable routeing with power supply inside the totem
- incl. connecting terminals for potential equalisation
- matching screen mount for LG XE4F-M series
- incl. a door on the back for quick access
- air inlets and outlets specifically adapted to the display size
- ambient temperature range from -30 °C to +50 °C







lesigned for:



Item no.:		recommended screen size		Colour
2502	ScreenOut 49XE4F-M	LG 49XE4F-M	H 2112 x W 828 x D 135 mm	
2503	ScreenOut 55XE4F-M	LG 55XE4F-M	H 2112 x W 903 x D 135 mm	

WH OHF Series

Wall mount for Samsung OHF series

- specific mounting hole pattern
- portrait or landscape installation
- hang out protection via theft-resistant screw (on the back)
- incl. resistorx tool (theft preventing)
- material: stainless steel (powder-coated)
- with corrosion-resistant plastic powder-coating, highly weather-resistant
- designed according to Samsung guidelines for OHF series









SAMSUNG

Item no.:	Item name	recommended screen size	Size	Load (max.)	Colour
5750	WH OH46F	Samsung OH46F	H 576 x W 1055 x D 95 mm	displayspezifisch	
5752	WH OH55F	Samsung OH55A OH55F	H 635 x W 1246 x D 94 mm	displayspezifisch	
5756	WH OH85F-Landscape	Samsung OH85F	H 1051 x W 2004 x D 84 mm	displayspezifisch	
5757	WH OH85F-Portrait	Samsung OH85F	H 1231 x W 1185 x D 88 mm	displayspezifisch	

WH LG XE4F-M Series

Wall mounts for LG XE4F-M series

- specific mounting hole pattern
- portrait or landscape installation
- hang out protection
- material stainless steel (powder-coated)
- with corrosion-resistant plastic powder-coating, highly weather-resistant







designed for:



Item no.:	Item name	recommended screen size	Size	Load (max.)	Colour
2504	WH LG 49XE4F-M	LG 49XE4F-M	W 1108 x H 576 x D 114 mm	displayspezifisch	
2514	WH LG 55XE4F-M	LG 55XE4F-M	W 1246 x H 635 x D 114 mm	displayspezifisch	

Mounting Systems | display specific

PLD Samsung OMN Cover

Display-specific for Samsung OMN series

- specially developed for Samsung OMN series
- portrait or landscape installation
- ± 20° swivelling
- slim design
- incl. service flaps
- internal cable routeing
- height adjustable from 900 - 1600 mm (centre of screen)











SAMSUNG

Item no.:	Item name	recommended screen size	Load (max.)	Colour
2294	PLD Samsung OM46N Cover	Samsung OM46N	60 kg	
2293	PLD Samsung OM55N Cover	Samsung OM55N	60 kg	

Mounting systems for OMN-D series


Display specific for Samsung OMN-D series

- flexible positioning
- can be positioned close to the shop window
- cable routeing inside the frame
- impact and scratch proof powder coating
- optionally available as
- floor stand with tilt-proof base plate and levelling via adjusting screws
- floor mount with base plate to fix on the floor
- ceiling mount with 30° tiltable ceiling flange, height adjustable in detents from 600 mm min. to 1000 mm max. (tool needed), frame assembly directly on the ceiling possible (no use of the extension)













Ceiling Mount OMN-D


SAMSUNG

Item no.:	Item name	recommended screen size	Load (max.)	Size	Colour
1901	Floor Stand OM46N-D	Samsung OM46N-D	35 kg	H 2103 x W 891 x D 500 mm	
1902	Floor Stand OM55N-D	Samsung OM55N-D	45 kg	H 2296 x W 970 x D 500 mm	
1917	Floor Mount OM46N-D	Samsung OM46N-D	35 kg	H 2073 x W 891 x D 240 mm	
1918	Floor Mount OM55N-D	Samsung OM55N-D	45 kg	H 2265 x W 970 x D 240 mm	
1899	Ceiling Mount OM46N-D	Samsung OM46N-D	35 kg	H 2339 x W 680 x D 80 mm	
1900	Ceiling Mount OM55N-D	Samsung OM55N-D	45 kg	H 2530 x W 788 x D 80 mm	

Cisco Room Kit Adapter

Product specific universal adapter

- installation between screen and suitable universal screen mounting
- suitable for:
 - -Cisco Webex Room Kit Mini
 - -Cisco Webex Room Kit
 - -Cisco Webex Room Kit Plus
- height adjustable
- powder-coated
- can be mounted above and beneath the screen
- max. VESA 800 mm



Item no.:	Item name	recommended screen size	Colour
1925	Cisco Room Kit Adapter 55 - 75"	55 - 75" 140 - 191 cm	
2900	Cisco Room Kit Adapter 75 - 86"	75 - 86" 191 - 218 cm	

Cisco Room Kit Adapter Dual

Product specific universal adapter

- installation between screen and suitable universal screen mounting
- suitable for:
 - -Cisco Webex Room Kit Mini
 - -Cisco Webex Room Kit
 - -Cisco Webex Room Kit Plus
- for the central placement between 2 screens
- height adjustable
- powder-coated
- can be mounted above and beneath the screen
- max. VESA 800 mm




		recommended screen size	Colour
2282	Room Kit Adapter Dual 55, 65, 75"	55, 65, 75" 140, 165, 191 cm	
2904	Room Kit Adapter Dual 75 - 86"	75 - 86" 191 - 218 cm	

Cisco Room- Kit Adapter Webex Board

Product specific universal adapter

- installation between screen and suitable universal screen mounting
- suitable for Webex Board series
- suitable for:
 - Cisco Webex Room Kit Mini
 - Cisco Webex Room Kit
 - Cisco Webex Room Kit Plus
- height adjustable
- powder-coated



Item no.:		recommended screen size	Colour
2901	Cisco Room Kit Adapter Webex Board 55	55" 140 cm	
2902	Cisco Room Kit Adapter Webex Board 70	70" 178 cm	
2903	Cisco Room Kit Adapter Webex Board 85S	85" 216 cm	

Meetup Display Adapter

Product specific universal adapter

- installation between screen and suitable universal screen mounting
- suitable for Logitech Meetup video conference cameras
- height adjustable
- can be adjusted exactly to the required height via oblong hole
- can be mounted above and beneath the screen
- max. VESA 800 mm




0	0	0	0			0	0	0	0
]#[]#[
				0	0				

Item no.:	Item name	recommended screen size	Colour
2278	Meetup Display Adapter 55 - 75"	55 - 75" 140 - 191 cm	
2279	Meetup Display Adapter 75 - 86"	75 - 86" 191 - 218 cm	


Poly Display Adapter

Product specific universal adapter

- installation between screen and suitable universal screen mounting
- suitable with Poly Studio and Poly Studio X50 video conference
- height adjustable
- can be adjusted exactly to the required height via oblong hole








Item no.:		recommended screen size	Colour
2286	Poly Display Adapter 55 - 75"	55 - 75" 140 - 191 cm	
2287	Poly Display Adapter 75 - 86"	75 - 86" 191 - 218 cm	

LS-1 Sound Bar

Adaption for sound bar

- can be used with any VESA universal holder from min. VESA 200 to max. VESA 600 mm
- can be mounted above and beneath the screen
- width and depth continuously adjustable





		recommended screen size	Load (max.)	Colour	
8900	LS-1 Sound Bar	55 - 75" 140 - 191 cm	10 kg		

PLW Column

Tiltable mount for adaptation to columns

- for a column diameter up to \emptyset 1.5 m
- incl. VESA holding fixture 100 x 100 mm min. to 400 x 400 mm max.
- continuously tiltable from 0 to 15°
- maximum load: 30 kg
- stainless steel tightening straps included
- lockable







BL Swingmount L

Swivelling wall mounts

- variable distance to wall by swivelling mechanism
- 180° swivelling
- installation direction selectable (left or right)
- dimensions: W 870 x H 430 mm



2600	BL Swingmount L	32" - 55" 81 - 140 cm	600 x 400 mm	40 kg	
Item no.:		recommended screen size	VESA (max.)	Load (max.)	Colour

PLD Single Small | Medium | Large Ceiling mounts

- screen installation in portrait or landscape format
- TV holding fixture tiltable from -5 to +15°
- TV holding fixture rotatable ± 30°
- height adjustable in 50 mm steps
- variable distance to ceiling: 920 3000 mm
- ceiling module tiltable from 0 to 90°
- internal cable routeing









PLD Small Single



PLD Medium Single



PLD Large Single



Extension up to max. 3000 mm, via extension tubes included in the scope of delivery

Item no.:		recommended screen size		Load (max.)	Colour
8600	PLD Small Single	24 - 32" 61 - 81 cm	max. 200 x 200 mm	50 kg	
8601	PLD Medium Single	32 - 49" 81 - 124 cm	max. 400 x 400 mm	50 kg	
8602	PLD Large Single	49 - 65" 124 - 165 cm	max. 600 x 400 mm	50 kg	

PLD Single HD

Ceiling mount

- screen installation in landscape format
- height adjustable to max. 1450 mm (tool needed)
- TV holding fixture tiltable from 0 to 15°
- internal cable routeing









Item no.:		recommended screen size		Load (max.)	Colour
2700	PLD Single HD	75 - 100" 190 - 254 cm	max. 900 x 600 mm	100 kg	

PLD Single HD Portrait

Ceiling mount

- screen installation in portrait format
- height adjustable to max. 1450 mm (tool needed)
- TV holding fixture tiltable from 0 to 15°
- internal cable routeing







Item no.:		recommended screen size		Load (max.)	Colour
2701	PLD Single HD Portrait	75 - 100" 190 - 254 cm	max. 600 x 900 mm	100 kg	

PLD I-Beam Adapter

Optional I-beam adapter

- can be used with the PLD series
- adaption to I- and double I-beams
- adjusting range of the I-beam clamp from 100 to 260 mm



Item no.:	Item name	Colour
1839	PLD I-Beam Adapter	

Ceiling mounts | single

HA DH S Series

Ceiling mounts

- single screen installation in portrait or landscape format
- distance to ceiling variable adjustable in 100 mm steps
- TV holding fixture tiltable from -5 / +30°
- ± 15° rotatable
- internal cable routeing
- incl. cover (ring) for suspended ceilings









Item no.:		recommended screen size			Load (max.)	Colour
2702	HA DH 400 - 700 S	32 - 50" 81 - 127 cm	max. 400 x 400 mm	400 - 700 mm	50 kg	
2704	HA DH 900 - 1600 S	32 - 50" 81 - 127 cm	max. 400 x 400 mm	900 - 1600 mm	50 kg	

HA DH L Series Ceiling mounts single - screen installation in portrait or landscape format - distance to wall variable adjustable in 100 mm steps - TV holding fixture tiltable from -5/+30° - ± 15° rotatable - internal cable routeing - incl. cover (ring) for suspended ceilings 2703 HA DH 400 - 700 L 55 - 75" | 140 - 191 cm max. 800 x 600 mm 400 - 700 mm 50 kg

max. 800 x 600 mm

900 - 1600 mm

2705

HA DH 900 - 1600 L

55 - 75" | 140 - 191 cm

HA DH Duo S

Ceiling mount

- back-to-back screen installation in portrait or landscape format
- distance to ceiling: 400 700 mm (centre of screen)
- distance to wall variable adjustable in 100 mm steps
- TV holding fixture tiltable from -5/+30 $^{\circ}$
- ± 15° rotatable
- internal cable routeing
- incl. cover (ring) for suspended ceilings











Item no.:	Item name	recommended screen size		Distance from ceiling	Load (max.)	Colour
2706	HA DH Duo S	32 - 50" 81 - 127 cm	max. 400 x 400 mm	400 - 700 mm	2x 35 kg	

HA DH Duo L Ceiling mount

- back-to-back screen installation in portrait or landscape format
- distance to ceiling: 900 1600 mm (centre of screen)
- distance to wall variable adjustable in 100 mm steps
- TV holding fixture tiltable from -5/+30°
- ± 15° rotatable
- internal cable routeing
- incl. cover (ring) for suspended ceilings











2707	HA DH Duo L	55 - 75" 140 - 191 cm	max. 800 x 600 mm	900 - 1600 mm	2x 35 kg	
		recommended screen size		Distance from ceiling	Load (max.)	Colour

Ceilingmounts | Accessories

HA Cam Holder

Camera shelf available as an option

- can be used with almost every Hagor TV mounting system (wall, stand, ceiling mounts etc.)
- horizontal distance adaptable to the given VESA standard (400 | 600 | 800)
- with universal oblong hole to fix the camera in position
- continuously height adjustable (tool needed)
- can be mounted above and beneath the screen





Item no.:		recommended screen size		Load (max.)	Colour
2909	HA Cam-Holder	bis max. 75" 165 cm	W 850 x D 138,5 mm	10 kg	

HP PC Box

Optional box to accommodate a content player or mini PC

- box to accomodate a content player or mini PC
- distance to wall: 65 mm
- can also be used as a fixed wall mount via installation directly to the wall (26 - 32" | 66 - 81 cm)
- lockable with padlock (included in the scope of delivery)







8901	HP PC Box	50 x 50 mm, 75 x 75 mm, 100 x 100 mm, 200 x 100 mm, 200 x 200 mm	W 250 x H 250 x D 65 mm	30 kg	
Item no.	Item name	VESA	Dimensions	Load (max.)	Colour

Traverse Adapter Plate

Optional for attachment under cross beams

- set consisting of:
 - 1x traverse plate
 - 2x pipe clamps
- usable with PLD and HA DH series






			Colour
2239	Traverse Adapter Plate	45 - 90 mm	

VESA Adapter Plate 200 | 400

Optional accessory for extension of the VESA standard

- screen installation in portrait or landscape format possible
- extends the VESA standard





Item no.:			Colour
1797	VESA Adapter Plate 200	200 x 100 mm 200 x 200 mm	
1758	VESA Adapter Plate 400	400 × 200 mm 300 × 300 mm 400 × 400 mm	

VESA Adapter Stripes 600 | 800 | 900

Optional accessory for extension of the VESA standard

- installation in landscape or portrait format possible
- hole spacing: 100 mm
- set of 2 parts









Installation example

Item no.:	Item name	VESA (max.)	Length	Colour
1334	VESA Adapter Stripes 600	600 mm	620 mm	
1469	VESA Adapter Stripes 800	800 mm	810 mm	
1447	VESA Adapter Stripes 900	900 mm	920 mm	

Samsung QB | QH | QM Portrait Adapter Plate

Display specific adapter plates for Samsung QB and QM series

- suitable for Samsung QB, QH and QM series in connection with suitable HAGOR mounts
- allows a centered alignment of the screen when mounted in portrait format
- available in 2 sizes





Item no.:		recommended screen size		Colour
2289	Samsung QB QH QM 32 - 43" Portrait Adapter Plate	Samsung QB QH QM Series 32 - 43"	W 295 x H 240 x D 3 mm	
2280	Samsung QB QH QM 49 - 65" Portrait Adapter Plate	Samsung QB QH QM Series 49 - 65"	W 440 x H 400 x D 3 mm	

HA Table Stand | HA Table Stand L

Table mount


- screen installation in landscape format
- +5° / -10° tiltable
- ± 35° swivelling
- internal cable routeing
- incl. optional safety rope (additional anti tipping device to the wall)









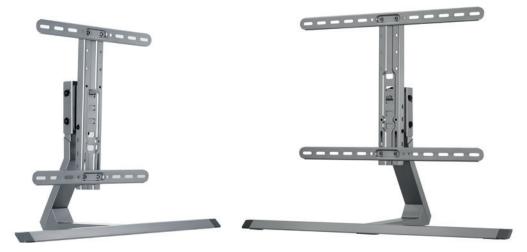

Item no.:		recommended screen size		Load (max.)		Foot print	Colour
8700	HA Table Stand	32 - 55" 81 - 140 cm	max. 400 x 400 mm	40 kg	min. 583 - max. 733 mm	W 760 x D 343 mm	
8701	HA Table Stand L	55 - 75" 140 - 191 cm	max. 600 x 400 mm	40 kg	min. 583 - max. 733 mm	W 905 x D 343 mm	

Table Stand BL Eco

Table mount

- screen installation in landscape format
- universally applicable
- height adjustable in 3 steps (tool needed)
- ± 6° tiltable
- cable management via cable clips
- incl. anti-slip cover, scratch protection for the furniture surface







Item no.:		recommended screen size		Load (max.)	Colour
2290	Table Stand BL Eco	37 - 70" 94 - 178 cm	vertical VESA 75 mm - 400 mm, width arbitrary	50 kg	

VWH-1 | VWH-4

Video wall mount

- screen installation in portrait or landscape format
- distance to wall in central position 98 to 292 mm max. incl. fine adjustment by $\pm\,6$ mm
- fine adjustment via included adjusting screws (with no tools needed)
- 8-point fine adjustment for height, width and depth
- incl. pop-out system for optimal service access, also during running operation
- unlimited video wall configuration, extendable in height and width
- VWH-1 incl. adapter set for assembly of VESA 600 x 400 or 400 x 600 mm
- available as an option: VESA adapter to VESA 800
- available as an option: display specific interspace template for quick assembly









Adapter for VESA 600 (included)





Item no.:		recommended screen size	VESA (max.)	Load (max.) Länge	Colour
1379	VWH-1	42 - 55" 107 - 140 cm	400 x 400 mm with Adapter 600 x 400 mm	40 kg	
1625	VWH-4	55 - 75" 140 - 191 cm	400 x 400 mm	75 kg	
1469	VESA Adapter Stripes 800	-	800 mm	810 mm	

VWH-1-Slim

Video wall mount

- screen installation in portrait or landscape format
- ultra-flat distance to wall from 54 to 264 mm max.
 incl. fine adjustment by ± 5 mm
- fine adjustment via included adjusting screws (with no tools needed)
- 8-point fine adjustment for height, width and depth
- incl. adapter set for assembly of VESA 600 x 400 or 400 x 600 mm
- incl. pop-out system for perfect service access, also during running operation
- unlimited video wall configuration, extendable in height and width
- available as an option: VESA adapter to VESA 800
- available as an option: display specific interspace template for quick assembly







Adapter for VESA 600 (included)





Item no.:	Item name	recommended screen size	VESA (max.)	Load (max.) Length	Colour
5790	VWH-1-Slim	42 - 55" 107 - 140 cm	400 x 400 mm with Adapter 600 x 400 mm	35 kg	
1469	VESA Adapter Stripes 800	-	800 mm	810 mm	

VWH-NT (contactless)

Video wall mount

- screen installation in portrait or landscape format
- the special mechanism with magnetic lock makes it possible to move out the mount without having to apply pressure on the screen
- distance to wall in central position
 104 mm min. to 297 mm max. (without L-adapter)
 107 mm min. to 301 mm max. (with L-adapter)
 incl. fine adjustment by ± 5 mm
- fine adjustment via included adjusting screws (with no tools needed)
- 8-point fine adjustment for height, width and depth
- unlimited video wall configuration extendable in height and width
- incl. L-adapter set for VESA 600 x 400 or 400 x 600 mm
- available as an option: VESA adapter to VESA 800
- available as an option: display specific interspace template for quick assembly
















Item no.:		recommended screen size	VESA (max.)	Load (max.) Länge	Colour
1751	VWH-NT	42 - 55" 107 - 140 cm	400 x 400 mm mit Adapter 600 x 400 mm	40 kg	
1469	VESA Adapterstreifen 800	-	800 mm	810 mm	

VWH-ASxxx drill template

Quick assembly aid


- electively for VWH-1 / VWH-4 or VWH-1 Slim (the templates cannot be combined with each other)
- available for all video wall screens
- set of 2, consisting of 1 horizontal spacer and 1 vertical spacer so that it can be either used for installation in portrait or landscape format
- it is unnecessary to measure any other distances
- massive saving of time
- can be re-used indefinitely often in case of same display type
- display list under: www.hagor.de











Item no.:	Item name		
Depending on the display model	VWH-ASxxx drill template for VWH-1 VWH-NT VWH-4		
Depending on the display model	VWH-ASxxx drill template for VWH-1 Slim		

VWH-5

Heavy Duty Pop-Out Holder

- screen installation in portrait or landscape format
- distance to wall with adjustable depth from
 - 121 mm 132 mm min. (pulled-in) to 336 mm 347 mm max. (pulled-out)
- especially suitable as mounting support for wall recesses
- incl. pop-out system for optimal service access, also during running operation
- available as an option: touch frame for application of a large-sized touch screen













Item no.:		recommended screen size	VESA (max.)	Load (max.)	Colour
1628	VWH-5	65 - 105" 165 - 267 cm	400 x 400 mm	150 kg	
5070	VWH-5 Adapter frame 900/800 x 600 mm	-	900 / 800 x 600 mm	150 kg	
1634	VWH-5 Touch frame	-	-	150 kg	

VWH-5 Adapter Stripes VESA 600

Optional VESA adapter

- extends the VESA standard to 600 x 400 or 400 x 600 mm
- max. load remains the same



5768	VWH-5 Adapter Stripes VESA 600	600 x 400 or 400 x 600 mm	
Item no.:		VESA (max.)	Colour

VWH-5 Adapter Stripes VESA 800

Optional VESA adapter

- extends the VESA standard to 800 x 500 or 500 x 800 mm
- max. load remains the same



	Item no.:	Item name	VESA (max.)	Colour
ı	5769	VWH-5 Adapter Stripes VESA 800	800 x 500 or 500 x 800 mm	

VWH-3

Video wall mount

- screen installation in portrait or landscape format
- distance to wall: 98 mm incl. fine adjustment by ± 5 mm
- 8-point levelling
- ± 5 mm fine adjustment of depth
- unlimited video wall configurations
- incl. adapter set for installation of VESA 600 x 400 or 400 x 600 mm







Item no.:		recommended screen size		Load (max.)	Colour
1484	VWH-3	42 - 55" 107 - 140 cm	max. 400 x 400 mm with Adapter 600 x 400 mm	50 kg	

VWH-1 Small

Video wall mount

- screen installation in portrait or landscape format
- distance to wall in central position 95 to 275 mm max.
 incl. fine adjustment by ± 5 mm
- 6-point levelling
- click-out system for optimal service access
- unlimited video wall configurations









Item no.:		recommended screen size		Load (max.)	Colour
1511	VWH-1 Small	32 - 40" 81 - 102 cm	max. 200 x 200 mm	25 kg	

VWR frames for 46/47" and 55"

Video wall multiple frame for quick installation

- available for portrait or landscape installation
- wide variety of configurations available
- only 67 mm distance to wall
- depth fine-adjustable up to \pm 4 mm
- height adjustable via manually adjustable knurled thumb screws
- M8-Pins included in delivery, M6-Pins optionally available
- quick installation, cost-effective solution











VWR frames for 46/47"

Item no.:		recommended screen size		Load (max.) (per Screen)		Colour	
5450	VWR 1 x 2	46 - 47" 117 - 119 cm	max. 600 x 400 mm	30 kg	Landscape		
5415	VWR 2 x 1	46 - 47" 117 - 119 cm	max. 600 x 400 mm	30 kg	Landscape		
5370	VWR 2 x 2	46 - 47" 117 - 119 cm	max. 600 x 400 mm	30 kg	Landscape		
5375	VWR 3 x 2	46 - 47" 117 - 119 cm	max. 600 x 400 mm	30 kg	Landscape		
5540	VWR 2 x 3	46 - 47" 117 - 119 cm	max. 600 x 400 mm	30 kg	Landscape		
5395	VWR 3 x 3	46 - 47" 117 - 119 cm	max. 600 x 400 mm	30 kg	Landscape		
5410	VWR 2 x 2	46 - 47" 117 - 119 cm	max. 400 x 600 mm	30 kg	Portrait		
5535	VWR 3 x 2	46 - 47" 117 - 119 cm	max. 400 x 600 mm	30 kg	Portrait		
5432	Pins M6 for VWR-frames						

VWR frames for 55"

Item no.:	Item name	recommended screen size	VESA	Load (max.) (per Screen)	Alignment	Colour
5455	VWR 1 x 2	55" 140 cm	max. 600 x 400 mm	30 kg	Landscape	
5550	VWR 2 x 1	55" 140 cm	max. 600 x 400 mm	30 kg	Landscape	
5380	VWR 2 x 2	55" 140 cm	max. 600 x 400 mm	30 kg	Landscape	
5385	VWR 3 x 2	55" 140 cm	max. 600 x 400 mm	30 kg	Landscape	
5545	VWR 2 x 3	55" 140 cm	max. 600 x 400 mm	30 kg	Landscape	
5405	VWR 3 x 3	55" 140 cm	max. 600 x 400 mm	30 kg	Landscape	
5525	VWR 2 x 2	55" 140 cm	max. 400 x 600 mm	30 kg	Portrait	
5530	VWR 3 x 2	55" 140 cm	max. 400 x 600 mm	30 kg	Portrait	
5432			Pins M6 for VWR-fran	nes		

HA-VWT 2 x 2 Landscape

Video wall trolley

- Video wall trolley for a 2 x 2 split
- every display holding fixture with separate fine adjustment for height and depth
- incl. cable clips for decent cable management
- height adjustable along the column
- incl. castors with lock-type brake
- height of the upper screen row: 1880 mm max.



Item no.:		recommended screen size		Load (max.)	Colour
5800	HA-VWT 2 x 2 Landscape	46 - 55" 117 - 140 mm	max. 800 x 400 mm	4x 40 kg 160 kg	

HA-VWT 2 x 2 Portrait

Video wall trolley

- Video wall trolley for a 2 x 2 split
- every display holding fixture with separate fine adjustment for height and depth
- incl. cable clips for decent cable management
- height adjustable along the column
- incl. castors with lock-type brake
- height of the upper screen row: 2600 mm max.



Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
5803	HA-VWT 2 x 2 Portrait	46 - 55" 117 - 140 mm	max. 400 x 400 mm	4x 40 kg 160 kg	
1334	VESA Adapter Stripes 600	-	max. 600 mm	remains the same	
1469	VESA Adapter Stripes 800	-	max. 800 mm	remains the same	

HA-VWT 3 x 2 Landscape

Video wall trolley

- Video wall trolley for a 3 x 2 split
- every display holding fixture with separate fine adjustment for height and depth
- incl. cable clips for decent cable management
- height adjustable along the column
- incl. castors with lock-type brake
- height of the upper screen row: 2600 mm max.



Item no.:		recommended screen size		Load (max.)	Colour
5801	HA-VWT 3 x 2 Landscape	46 - 55" 117 - 140 mm	max. 800 x 400 mm	6x 40 kg 240 kg	

HA-VWT 3 x 3 Landscape

Video wall trolley

- Video wall trolley for a 3 x 3 split
- every display holding fixture with separate fine adjustment for height and depth
- incl. cable clips for decent cable management
- height adjustable along the column
- incl. castors with lock-type brake
- height of the upper screen row: 2600 mm max.



5802	HA-VWT 3 x 3 Landscape	46 - 55" 117 - 140 mm	max. 800 x 400 mm	9x 40 kg 360 kg	
		recommended screen size		Load (max.)	Colour

HA-VWT 3 x 2 Portrait

Video wall trolley

- Video wall trolley for a 3 x 2 split
- every display holding fixture with separate fine adjustment for height and depth
- incl. cable clips for decent cable management
- height adjustable along the column
- incl. castors with lock-type brake
- height of the upper screen row: 2600 mm max.




Item no.:	Item name	recommended screen size	VESA	Load (max.)	Colour
5804	HA-VWT 3 x 2 Portrait	46 - 55" 117 - 140 mm	max. 400 x 400 mm	6x 40 kg 240 kg	
1334	VESA Adapter Stripes 600	-	max. 600 mm	remains the same	
1469	VESA Adapter Stripes 800	-	max. 800 mm	remains the same	


VWS Cube


Modular video wall stand system

- for screens from 46 65" | 117-165 cm
- setup of system either centred or flush with front edge
- selectable height of bottom edge of screen (depending on screen 8 145 cm)
- screen installation in portrait or landscape format
- width indefinitely expandable
- landscape installation up to 7 rows on top of each other (7 for 46", 6 for 55", 5 for 60")
- portrait installation up to 3 rows on top of each
- no tools required for installation with spring bolts
- fine adjustment of screens on 8 points
- standard colour: black more RAL colours possible
- optional: set of castors incl. lock-type brake
- optional: blind frames (make it possible to encase the entire system. Also available for base, side frames and distance frames (spacer)
- optional: curved adapter (an angle of 30° max. can be generated per standing element



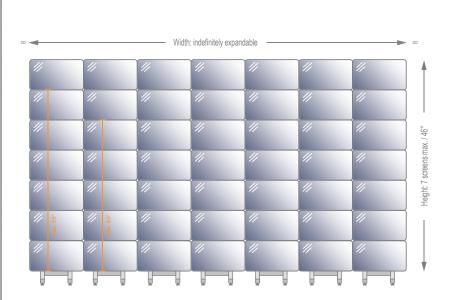





No tools required for installation with captive screws



Various starting heights can be selected (depending on screen from 8 to 145 cm)



Fine-adjustment for an exact splitwall



Adjustable feet to balance unevenness of floor



As an option, adapters for a curved setup are available



Portrait or Landscape installation



With blind frame for floor elements and frame construction as an option



Dead weight plates as counterweights make sure that the construction does not tilt over in case of front setup

ScreenOut® Eco Kiosk M | L

Outdoor totem with heating and ventilation

- incl. pull-out function of screen for optimal service access
- 6.4 mm thick, antireflective laminated safety glass (LSG)
- manufactured according to: IP 65 / NEMA 4 (front side) and IP 54 (back side)
- totem is lockable, protection from unauthorized access and vandalism
- enough space for mini PC or Set Top Box
- standard: anthracite grey (RAL 7016), more RAL colours on request
- double sensor-based temperature control
- thanks to high-quality heating and ventilation suitable for an ambient temperature range between -25 and +40°C
- option: WLAN antenna (Item no.: 2515)
- option: RAL colour as desired (Item no.: 1657)











Item no.:		recommended screen size		Colour
1662	ScreenOut Eco Kiosk M - incl. heating & high-quality ventilation	46 - 49" 117 - 124 cm	W 963 x H 1950 x D 348 mm	RAL 7016
1663	ScreenOut Eco Kiosk L - incl. heating & high-quality ventilation	50 - 55" 127 - 140 cm	W 1034 x H 2089 x D 348 mm	RAL 7016

ScreenOut® Eco Kiosk XL | XXL

Outdoor totem with heating and ventilation

- incl. pull-out function of screen for optimal service access
- 6.4 mm thick, antireflective laminated safety glass (LSG)
- manufactured according to: IP 65 / NEMA 4 (front side) and IP 54 (back side)
- totem is lockable, protection from unauthorized access and vandalism
- enough space for mini PC or Set Top Box
- standard: anthracite grey (RAL 7016), more RAL colours on request
- double sensor-based temperature control
- thanks to high-quality heating and ventilation suitable for an ambient temperature range between -25 and +40°C
- option: WLAN antenna (Item no.: 2515)
- option: RAL colour as desired (Item no.: 1657)



1979



ScreenOut Eco Kiosk XL - incl. heating & high-quality ventilation

ScreenOut Eco Kiosk XXL - incl. heating & high-quality ventilation





75" | 191 cm

85 - 86" | 216 - 218 cm





ScreenOut® Pro Back-to-Back

Outdoor totem with heating and ventilation

- for 2 screens "back-to-back"
- 6.4 mm thick, antireflective laminated safety glass (LSG)
- manufactured according to: IP 65 / NEMA 4 (front side) and IP 54 (back side)
- totem is lockable, protection from unauthorized access and vandalism
- enough space for mini PC or Set Top Box
- standard: anthracite grey (RAL 7016), more RAL colours on request
- double sensor-based temperature control
- thanks to high-quality heating and ventilation suitable for an ambient temperature range between -25 and +40°C
- option: WLAN antenna (Item no.: 2515)
- option: RAL colour as desired (Item no.: 1657)













Item no.:		recommended screen size		Colour	
1743	ScreenOut Pro 55" Back-to-Back - incl. heating & high-quality ventilation	55" 140 cm	dependents on display	RAL 7016	
2507	ScreenOut Pro 75" Back-to-Back - incl. heating & high-quality ventilation	75" 191 cm	dependents on display	RAL 7016	



Enclosures | outdoor

ScreenOut® Pro Outdoor protective enclosures

Outdoor protective enclosures with heating and ventilation

- incl. pull-out function of screen for optimal service access
- 6.4 mm thick, antireflective laminated safety glass (LSG)
- manufactured according to: IP 65 / NEMA 4 (front side) and IP 54 (back side)
- lockable, protection from unauthorized access and vandalism
- enough space for mini PC or Set Top Box
- standard: anthracite grey (RAL 7016), more RAL colours on request
- double sensor-based temperature control
- thanks to high-quality heating and ventilation suitable for an ambient temperature range between -25 and +40°C
- variable distance to wall by means of stair bolts







incl. heating elements



temperature control







Item	no.:	Harm warme	Screen size	Dimer	nsions	Colour
Landscape			Screen size	Landscape		Colour
1934	1933	ScreenOut Pro -XS- - incl. heating & high-quality ventilation	32" 81 cm	W 908 x H 598 x D 206 mm	W 598 x H 908 x D 206 mm	RAL 7016
1646	1650	ScreenOut Pro -S- - incl. heating & high-quality ventilation	40 - 43" 101 - 109 cm	W 1141 x H 729 x D 206 mm	W 729 x H 1141 x D 206 mm	RAL 7016
1647	1651	ScreenOut Pro -M- - incl. heating & high-quality ventilation	46 - 49" 117 - 124 cm	W 1285 x H 810 x D 206 mm	W 810 x H 1285 x D 206 mm	RAL 7016
1648	1652	ScreenOut Pro -L- - incl. heating & high-quality ventilation	50 - 55" 127 - 140 cm	W 1410 x H 881 x D 206 mm	W 881 x H 1410 x D 206 mm	RAL 7016
1649	1653	ScreenOut Pro -XL- - incl. heating & high-quality ventilation	60 - 65" 152 - 165 cm	W 1639 x H 1009 x D 206 mm	W 1009 x H 1639 x D 206 mm	RAL 7016
1928	1927	ScreenOut Pro -XXL- - incl. heating & high-quality ventilation	75" 191 cm	W 1910 x H 1185 x D 226 mm	W 1185 x H 1910 x D 226 mm	RAL 7016
16	57		ScreenOut Pro Option: F	Pro Option: RAL color as desired		

ScreenOut® Pro Outdoor protective enclosures 84 - 98"

Outdoor protective enclosures with heating and ventilation

- 6.4 mm thick, antireflective laminated safety glass (LSG)
- manufactured according to: IP 65 / NEMA 4 (front side) and IP 54 (back side)
- high torsional stiffness thanks to complex slight pipes
- lockable, protection from unauthorized access and vandalism
- enough space for mini PC or Set Top Box
- standard: anthracite grey (RAL 7016), more RAL colours on request
- double sensor-based temperature control
- thanks to high-quality heating and ventilation suitable for an ambient temperature range between -25 and +40°C
- variable distance to wall by means of stair bolts







Item		Item name	BildschirmSize			Colour	
Landscape		item name	Dilusciliffisize	Landscape		Colour	
2508	2509	ScreenOut Pro 84 - 86" - incl. heating & high-quality ventilation	84 - 86" 213 - 218 cm	W 2130 x H 1305 x D 226 mm	W 1305 x H 2130 x D 226 mm	RAL 7016	
2512	2513	ScreenOut Pro 98" - incl. heating & high-quality ventilation	98" 249 cm	W 2420 x H 1470 x D 226 mm	W 1470 x H 2420 x D 226 mm	RAL 7016	
16	57		ScreenOut Pro Option	: RAL color as desired			

HAG-BR-1

Smoke protection enclosure

- certified material (DIN EN 13501-1/A1 s1, d0)
- incl. smoke protection
- encapsulation of fire load
- suitable for installation of screens in emergency and escape routes (without El30 stipulations)
- brilliant, tempered safety glass (6mm)
- incl. rear wall plate with cable feedthrough







Item	no.:	Itam nama	Item name Screen size		Dimer	nsions	Colour
Landscape	Portrait	item name	Screen size	Load (max.)	Landscape		Colour
1735	1874	HAG-BR-1 27 - 32"	27 - 32" 68 - 81 cm	40 kg	W 847 x H 541 x D 215 mm	W 541 x H 847 x D 217 mm	□ RAL 9010
1736	1875	HAG-BR-1 40 - 43"	40 - 43" 101 - 109 cm	40 kg	W 1085 x H 673 x D 215 mm	W 673 x H 1085 x D 217 mm	□ RAL 9010
1737	1876	HAG-BR-1 46 - 48"	46 - 48" 117 - 122 cm	60 kg	W 1227 x H 752 x D 215 mm	W 752 x H 1227 x D 217 mm	☐ RAL 9010
1738	1877	HAG-BR-1 49 - 55"	49 - 55" 124 - 140 cm	60 kg	W 1380 x H 836 x D 215 mm	W 836 x H 1380 x D 217 mm	□ RAL 9010
1881	1878	HAG-BR-1 65"	65" 165 cm	125 kg	W 1660 x H 934 x D 215 mm	W 934 x H 1660 x D 217 mm	□ RAL 9010
1882	1879	HAG-BR-1 75"	75" 191 cm	125 kg	W 1800 x H 1097 x D 215 mm	W 1097 x H 1800 x D 217 mm	□ RAL 9010

HAG-BR-30

Fire protection enclosure

- produced according to fire resistance EI30 (formerly F30)
- certified material (DIN EN 13501-1/A1 s1, d0)
- incl. smoke protection
- encapsulation of fire load
- suitable for installation of screens in emergency and escape routes (with EI30 stipulations)
- 15 mm thick fire-resisting glass with gel coat
- incl. rear wall plate with cable feedthrough







Item	no.:	Item name	Screen size Load (max.)				Colour
Landscape	Portrait	item name	Screen Size	Loau (IIIax.)	Landscape		
1739	1883	HAG-BR-30 27 - 32"	27 - 32" 68 - 81 cm	40 kg	W 854 x H 548 x D 215 mm	W 548 x H 854 x D 215 mm	□ RAL 9010
1740	1884	HAG-BR-30 40 - 43"	40 - 43" 101 - 109 cm	40 kg	W 1091 x H 679 x D 215 mm	W 679 x H 1091 x D 215 mm	□ RAL 9010
1741	1885	HAG-BR-30 46 - 48"	46 - 48" 117 - 122 cm	60 kg	W 1227 x H 766 x D 215 mm	W 766 x H 1227 x D 215 mm	□ RAL 9010
1742	1886	HAG-BR-30 49 - 55"	49 - 55" 124 - 140 cm	60 kg	W 1380 x H 850 x D 215 mm	W 850 x H 1380 x D 215 mm	□ RAL 9010
1856	1887	HAG-BR-30 65"	65" 165 cm	60 kg	W 1609 x H 979 x D 215 mm	W 979 x H 1609 x D 215 mm	□ RAL 9010

HAG-BR-30-Kiosk Portrait

Fire protection totem

- enclosed in a metal casing
- produced according to fire resistance EI30 (formerly F30)
- certified material (DIN EN 13501-1/A1 s1, d0)
- incl. smoke protection
- encapsulation of fire load
- suitable for installation of screens in emergency and escape routes (with El30 stipulations)
- 15 mm thick fire-resisting glass with gel coat
- incl. rear wall plate with cable feedthrough
- available in 2 versions





Dimensions	Colour

Item no.:		Item name recommended screen size		Colour	
2105	HAG-BR-30-Kiosk Portrait 43"	BR-30-Kiosk Portrait 43" 43" 109 cm		□ RAL 9010	
2106	HAG-BR-30-Kiosk Portrait 46/48" 46 / 48" 117 / 122 cm		H 1950 x W 809 x D 218 mm	□ RAL 9010	
2107	HAG-BR-30-Kiosk Portrait 55" 55" 140 cm		H 1950 x W 893 x D 218 mm	□ RAL 9010	
2801	Accessory: HAG-BR-30-Kiosk Base Plate				
2802	Accessory: HAG-BR-30-Kiosk Castor Set (only usable in connection with base plate)				

HAG-BR-30 fire protection flap set

optional ventilation for high brightness screens

- suitable for HAG-BR-30 Fire protection enclosures and HAG-BR-30 Kiosk Portrait Fire protection totem
- additional ventilation for screens with high heat generation, e.g. high brightness screens
- closes at an ambient temperature of 72 °C



	Item name
2800	HAG-BR-30 fire protection flap set

FIRE PROTECTION

Fire protection is relevant in many fields of everyday life. Sprinkler systems, fire extinguishers or automatic fire detection systems directly strike the eye in this regard.

However, fire protection generally includes all measures preventing the formation and spreading of fire, enabling the rescue of people and animals and effective firefighting operations in case of fire.

The demands to technology and systems are particularly high in emergency and escape routes. The EU's fire protection regulations do therefore not allow to use "normal" monitor enclosures as these protective enclosures are not only supposed to protect the screens from unauthorized access and vandalism but make sure that there are no risks emanating from the screens and displays used. For that reason, the demands to materials and workmanship have been particularly defined.

HAGOR Products offers many different versions of protective enclosures or totems, depending on the desired place of installation, with certification.

vis-it® portrait

Indoor totem

- portrait installation
- internal cable routeing
- integrated multiple plugbar
- colour: RAL-colour on request
- protection from unauthorized access by way of lockable door on the back, e. g. for mini PC etc.
- active ventilation (low-noise)
- for screens up to a depth of 68 mm max.
- optional:
 - set of castors with enlarged base plate (Item no.: 1977)
 - mini base plate to screw down on the floor (Item no.: 1999)
 - logo foil lettering (Item no.: 1552)
 - WLAN rod antenna (Item no.: 2517)
 - WLAN omnidirectional antenna (Item no.: 2518)
 - security glass: 42 46" (Item no.: 1973) | 49 55" (Item no.: 1974
 - touch foil





Item no.:		recommended screen size		Foot print	Colour
1910	1910 vis-it portrait 42 - 46" 42 - 46" 107 - 117 cm		H 2022 x W 700 x D 100 mm	W 720 x D 620 mm	RAL 7016
1912	vis-it portrait 49 - 55"	49 - 55" 124 - 140 cm	H 2022 x W 800 x D 100 mm	W 820 x D 620 mm	RAL 7016

vis-it® portrait Back-to-Back

Indoor totem "back-to-back"

- for 2 screens "back-to-back"
- portrait installation
- internal cable routeing
- integrated multiple plugbar
- colour: RAL-colour on request
- active ventilation (low-noise)
- protection from unauthorized access by way of lockable storage space, e.g. for mini PC etc.
- for screens up to a depth of 68 mm max.
- optional:
 - set of castors with enlarged base plate (Item no.: 1977)
 - mini base plate to screw down on the floor (Item no.: 1999)
 - logo foil lettering (Item no.: 1552)
 - WLAN rod antenna (Item no.: 2517)
 - WLAN omnidirectional antenna (Item no.: 2518)
 - security glass: 42 46" (Item no.: 1973) | 49 55" (Item no.: 1974)
 - touch foil





Item no.:		recommended screen size		Foot print	Colour
1911	vis-it portrait 42 - 46" Back-to-Back 42 - 46" 107 - 117 cm		H 2022 x W 720 x D 200 mm	W 720 x D 720 mm	RAL 7016
1913	vis-it portrait 49 - 55" Back-to-Back	49 - 55" 124 - 140 cm	H 2022 x W 800 x D 200 mm	W 820 x D 720 mm	RAL 7016

vis-it® landscape

Indoor totem

- landscape installation
- internal cable routeing
- integrated multiple plugbar
- colour: RAL-colour on request
- protection from unauthorized access by way of lockable door on the back, e.g. for mini PC etc.
- active ventilation (low-noise)
- for screens up to a depth of 68 mm max.
- optional:
 - set of castors with enlarged base plate (Item no.: 1977)
 - mini base plate to screw down on the floor (Item no.: 1999)
 - logo foil lettering (Item no.: 1552)
 - WLAN rod antenna (Item no.: 2517)
 - WLAN omnidirectional antenna (Item no.: 2518)
 - security glass: 42 46" (Item no.: 1973) | 49 55" (Item no.: 1974)
 - touch foil



Item no.:	Item name recommended screen size			Foot print	Colour
1914	1914 vis-it landscape 42 - 46" 42 - 46" 107 - 117 cm		H 2022 x W 1220 x D 100 mm	W 1220 x D 620 mm	RAL 7016
1915	vis-it landscape 49 - 55"	49 - 55" 124 - 140 cm	H 2022 x W 1420 x D 100 mm	W 1400 x D 620 mm	RAL 7016

vis-it® welcome

Indoor totem

- sloping, suitable for touch applications
- landscape installation
- internal cable routeing
- integrated multiple plugbar
- colour: RAL-colour on request
- active ventilation (low-noise)
- protection from unauthorized access by way of lockable door on the back, e.g. for mini PC
- for screens up to a depth of 68 mm max.
- optional:
 - set of castors with enlarged base plate (Item no.: 1977)
 - mini base plate to screw down on the floor (Item no.: 1999)
 - logo foil lettering (Item no.: 1552)
 - WLAN rod antenna (Item no.: 2517)
 - WLAN omnidirectional antenna (Item no.: 2518)
 - security glass: 42 46" (Item no.: 1973) | 49 55" (Item no.: 1974)





vis-it® HP Series

Indoor totem

- for single screens in portrait installation
- internal cable routeing
- ventilation slots for supply and exhaust air
- incl. thermally hardened safety glass 6 mm
- for screens with a max. installation depth of 95 mm
- incl. fine adjustment within the mount in height and depth for perfect alignment of the screen
- protection from unauthorized access by way of security pin screws
- incl. space for mini PC or other peripheral equipment
- special sizes feasible on request
- optional assembly incl. screen installation (Item no.: 5835)










Item no.:				Foot print		Colour	
Floorbase	Bolt-Down	3616611 3126		Bolt-Down		Bolt-Down	Coloui
5820	5825	40" 102 cm	H 1732 x W 674 x D 150 mm	H 1701 x B 674 x D 150 mm	W 674 x D 600 mm	W 674 x D 255 mm	RAL 7016
5821	5826	43" 109 cm	H 1732 x W 674 x D 150 mm	H 1701 x B 674 x T 150 mm	W 674 x D 600 mm	W 674 x D 255 mm	RAL 7016
5822	5827	48" 122 cm	H 2000 x W 835 x D 150 mm	H 1968 x B 835 x T 150 mm	W 835 x D 600 mm	W 835 x D 255 mm	RAL 7016
5823	5828	50" 127 cm	H 2000 x W 835 x D 150 mm	H 1968 x B 835 x T 150 mm	W 835 x D 600 mm	W 835 x D 255 mm	RAL 7016
5824	5829	55" 140 cm	H 2000 x W 835 x D 150 mm	H 1968 x B 835 x T 150 mm	W 835 x D 600 mm	W 835 x D 255 mm	RAL 7016

Inbox Digital Signage Series

Indoor protective enclosure

- portrait or landscape installation possible
- incl. ventilation system via ventilation slots
- standard version: black, powder-coated more RAL colours on request
- incl. TV holding fixture (customized to screen model)
- incl. depth adjustment of screen via oblong hole
- incl. concealed cable inlets on the back of the enclosure









Item no.:		recommended screen size	VESA (max.)	Load (max.)	Colour			
1779	Inbox Digital Signage 32"	32" 81 cm	200 x 200 mm	40 kg	■ RAL 9005			
1780	Inbox Digital Signage 40 - 43"	40 - 43" 102 - 109 cm	400 x 400 mm	40 kg	■ RAL 9005			
1781	Inbox Digital Signage 46 - 48"	46 - 48" 117 - 122 cm	600 x 400 mm	40 kg	■ RAL 9005			
2581	Inbox Digital Signage 49 - 50"	49 - 50" 124 - 127 cm	600 x 400 mm	40 kg	■ RAL 9005			
1782	Inbox Digital Signage 55 - 57"	55 - 57" 140 - 145 cm	600 x 400 mm	40 kg	■ RAL 9005			
1783	Inbox Digital Signage 65"	65" 165 cm	600 x 400 mm	40 kg	■ RAL 9005			
Item no.:		Item name						
1784		Inbox opti	on: glass in front of screen 32"					
1785		Inbox option	: glass in front of screen 40 - 42"					
1786		Inbox option	glass in front of screen 46 - 48"					
2582		Inbox option	glass in front of screen 49 - 50"					
1787		Inbox option	glass in front of screen 55 - 57"					
1788		Inbox opti	on: glass in front of screen 65"					
1789		Inbo	ox option: mini PC holder					
1849		Inbox o	ption: RAL colour as desired					

vis-it® Tilt 22 - 32" Black | White

Free standing indoor totem with continuous tilt adjustment

- continuous tilt adjustment (0-90°)
- adjustable to device weight hinges
- optimal service access via removable tower cover on the back
- cable management inside the column
- cable routeing possible via base plate
- various internal assembly levels for peripheral equipment



Item no.:		recommended screen size		Height (centre of screen)	Foot print	Load (max.)	Colour
1570	vis-it Tilt 22 - 32" Black	22 - 32" 55 - 81 cm	75 100 200 mm	1062 mm	W 500 x D 400 mm	12 kg with touch application	
1571	vis-it Tilt 22 - 32" White	22-32 33-01 (11)	73 100 200 111111	1062 mm	W 500 X U 400 mm	18 kg without touch application	

vis-it® Tilt Floormount 22 - 43" Black | White

Indoor totem to screw down on the floor with continuous tilt adjustment

- continuous tilt adjustment (0-90°)
- adjustable to device weight hinges
- optimal service access via removable tower cover on the back
- cable management inside the column
- cable routeing possible via base plate
- various internal assembly levels for peripheral equipment



Item no.:		recommended screen size		Height (centre of screen)	Foot print	Load (max.)	Colour
2338	vis-it Tilt Floormount 22 - 43" Black	22 - 43" 55 - 109 cm	75 100 200 mm	1062 mm	W 500 x D 400 mm	12 kg with touch application	
2339	vis-it Tilt Floormount 22 - 43" White	22 - 43 35 - 109 dill	75 100 200 MM	1062 mm	W 500 X D 400 mm	18 kg without touch application	

BrackIT®-C-Stopper

Mobile, digital customer stopper

- installation in portrait or landscape format possible
- incl. hang out protection
- 15° tiltable
- 12,5 kg deadweight
- mobile thanks to the integrated castors
- retractable
- almost completely pre-assembled on delivery









2227	BrackIT-C-Stopper	32 - 55" 81 - 140 cm	max. 400 x 600 mm	1240 mm	W 560 x D 534 mm	50 kg	Coloui
Item no.:	Item name	recommended screen size	VESA		Foot print	Load (max.)	Colour




Item no.:			Load (max.)	Colour
8650	Beamfix II	135 mm (without extension)	10 kg	
8651	Beamfix II 520 - 600 mm	520 - 600 mm	10 kg	
8652	Beamfix II 670 - 900 mm	670 - 900 mm	10 kg	
8653	Beamfix II 820 - 1200 mm	820 - 1200 mm	10 kg	

Projector Mounts

HA BDH Series

Ceiling mount for projectors

- universal ceiling mount for all commercially available projector models
- variable length mounting arms Ø min. 100 to Ø max. 400 mm
- 0 45° tiltable
- cable management
- continuous telescopic on the desired length (tool needed)











Item no.:	Item name	Distance to ceiling	Load (max.)	Colour
5805	HA BDH	187 mm	25 kg	
5806	HA BDH 490 - 750 mm	490 - 750 mm	25 kg	
5807	HA BDH 700 - 1250 mm	700 - 1250 mm	25 kg	
5808	HA BDH 1200 - 2000 mm	1200 - 2000 mm	25 kg	

Homefix I incl. mounting frame

Universal ceiling lift for projectors

- electrically continuously height adjustable
- space-saving belt strap guide for smooth, guiet operation
- with adjustable limit switch (clearance height)
- made of aluminium and steel
- incl. mini handheld transmitter with 20 m radio range
- integration into multimedia control possible
- incl. ceiling mounting frame for uptake of the ceiling cut-out
- installation height, min.: 115 mm
- optionally extendable







Item no.:	Item name		Length of lift	Load (max.)	Colour
2199	Homefix I incl. mounting frame	W 420 x D 495 mm	max. 800 mm	1 - 25 kg	

Homefix XXL

Universaldeckenlift für Beamer

- electrically continuously height adjustable
- space-saving belt strap guide for smooth, quiet operation
- with adjustable limit switch (clearance height)
- made of aluminium and steel
- incl. mini handheld transmitter with 20 m radio range
- integration into multimedia control possible
- incl. mounting frame to meet with ceiling opening
- installation height, min.: 115 mm
- optionally extendable





Item no.:	Item name	Space required	Length of lift	Load (max.)	Colour
1904	Homefix XXL	W 580 x D 595 mm	max. 600 mm	1 - 25 kg	

Homefix I Superslim

Universal ceiling lift for projectors

- electrically continuously height adjustable
- space-saving belt strap guide for smooth, quiet operation
- with adjustable limit switch (clearance height)
- made of aluminium and steel
- incl. mini handheld transmitter with 20 m radio range
- integration into multimedia control possible
- incl. mounting frame to meet with ceiling opening
- installation height, min.: 10 mm + height of device
- optionally extendable







1799	Homefix I Superslim	W 470 x D 470 mm	max. 500 mm	5 - 25 kg	
Item no.:	Item name		Length of lift	Load (max.)	Colour

HA Flex-Lock Tabletstand

Fully moveable tablet mount for table mounting

- usable for "through table" screw mounting (grommet) or for direct screwing in the tabletop
- max. construction depth 12 mm
- customizable to different tablet sizes
- mounting head rotatable from landscape to portrait format at any time (± 90°)
- ± 180° tiltable
- only 14 mm frame thickness
- for desktop widths to 50 mm max.
- incl. cable management
- theft preventing thanks to fixable frame elements (tool needed)









Item no.:		recommended screen size		Colour
8713	HA Flex-Lock Tabletstand	9.7 - 12.9" 24,6 - 32,7 cm	75 x 75 mm	

HA Flex-Lock Wallmount

Fully moveable tablet mount for an installation on the wall

- customizable to different tablet sizes
- 12 mm max. depth of the tablet
- mounting head rotatable from landscape to portrait format at any time (± 90°)
- ± 90° tiltable
- ± 10° swivelling
- theft preventing thanks to fixable frame elements (tool needed)









Item no.:		recommended screen size		Colour
8714	HA Flex-Lock Wallmount	9.7 - 12.9" 24,6 - 32,7 cm	75 x 75 mm 100 x 100 mm	

TSG-Stand

Optional foot

- foot usable with Flex Lock Wallmount or TSG tablet protective enclosure series
 - HA Tablet Case (Item no.: 8799)
 - tablet protective enclosure up to 10.1" (Item no.: 1495)
 - tablet protective enclosure starting at 10.1" (Item no.: 2583)
- incl. internal cable routeing
- tilt-resistant foot
- high-qualitiy surface finish (RAL 9005)







Sample illustration incl. tablet protective enclosure up to 10.1"



Sample illustration incl. HA Tablet Case


Accessories optional available.

Item no.:				Colour
2580	TSG-Stand	75 x 75 mm 100 x 100 mm	1000 mm	

TSG-tablet protective enclosures

Tablet protective enclosure for iOS, Windows and Android models

- incl. mortise lock on the side (anti-theft protection)installation in landscape or portrait format possible
- incl. hole pattern for extension to additional components
- suitable for almost all common tablet models with iOS, Windows or Android operating systems - more on request
- high-quality surface finish (RAL 9005)







Accessories optional available.

Item no.:		Colour
1495	TSG up to 10.1"	
2583	TSG from 10.1"	
8797	HA Tablet Stand	
8798	HA Tablet Wallmount	

Desktop Monitor Mounts | gas lift arms

HA Gasliftarm Single

Fully moveable Desktop Monitor Mount

- installation in portrait or landscape format possible
- rotation to landscape or portrait format possible at any time
- incl. concealed cable routeing along the arms, fixing via clips
- clamp mounting or screw mounting possible, for desktop widths between min. 10 and max. 84 mm
- height variable between 151 and 658 mm
- very easy to move thanks to the gas spring hovering system
- incl. adapter for VESA 200 x 100 mm
- ±45° tiltable (VESA holder)
- ±90° swivelling (VESA holder)
- ±180° rotatable (support arm)







Item no.:		recommended screen size		Load (max.)	Colour
8702	HA Gasliftarm Single	17 - 43" 43 - 109 cm	75 x 75 mm 100 x 100 mm 200 x 100 mm (with incl. adapter)	2,5 - 18 kg adjustable to device weight	

HA Gasliftarm Dual

Fully moveable Desktop Monitor Mount

- for 2 screens "side-by-side"
- installation in portrait or landscape format possible
- rotation to landscape or portrait format possible at any time (180° rotatable)
- incl. concealed cable routeing along the arms, fixing via clips
- clamp mounting or screw mounting possible, for desktop widths between min. 10 and max. 84 mm
- height variable between 181 and 688 mm
- very easy to move thanks to the gas spring hovering system
- -45 / +22° tiltable (VESA holder)
- ±32° swivelling (VESA holder)
- ±180° rotatable (support arm)







Item no.:		recommended screen size		Load (max.)	Colour
8703	HA Gasliftarm Dual	17 - 32" 43 - 81 cm	75 x 75 mm 100 x 100 mm	2x 2,5 - 10 kg adjustable to device weight	

HA Gasliftarm Medium Single

Fully moveable Desktop Monitor Mount

- installation in portrait or landscape format possible
- rotation to landscape or portrait format possible at any time (180° rotatable)
- incl. concealed cable routeing along the arms, fixing via clips
- clamp mounting or screw mounting possible, for desktop widths between min. 10 and max. 75 mm
- height variable between 260 and 504 mm
- very easy to move thanks to the gas spring hovering system
- -90 / +55° tiltable (VESA holder)
- ±90° swivelling (VESA holder)
- ±180° rotatable (support arm)










Item no.:		recommended screen size		Load (max.)	Colour
8715	HA Gasliftarm Medium Single	15 - 32" 38 - 81 cm	75 x 75 mm 100 x 100 mm	1,5 - 9 kg adjustable to device weight	


HA Gasliftarm Medium Dual

Fully moveable Desktop Monitor Mount


- installation in portrait or landscape format possible
- rotation to landscape or portrait format possible at any time
- incl. concealed cable routeing along the arms, fixing via clips
- clamp mounting or screw mounting possible, for desktop widths between min. 10 and max. 75 mm
- height variable between
 260 and 504 mm
- very easy to move thanks to the gas spring hovering system
- -90 / +55° tiltable (VESA holder)
- ±90° swivelling (VESA holder)
- ±180° rotatable (support arm)







Desktop Monitor Mounts | spring system

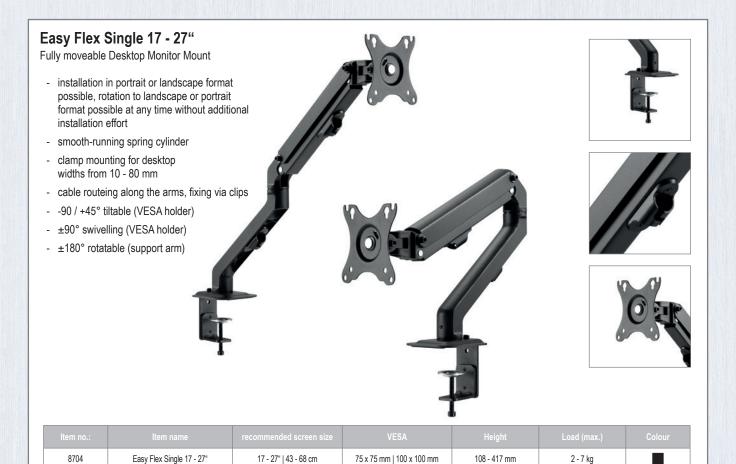


Easy Flex Dual 17 - 27"

Fully moveable Desktop Monitor Mount

- for 2 screens "side-by-side"
- installation in portrait or landscape format possible, rotation to landscape or portrait format possible at any time without additional installation effort
- smooth-running spring cylinder
- clamp mounting for desktop widths from 10 - 80 mm
- cable routeing along the arms, fixing via clips
- -90 / +45° tiltable (VESA holder)
- ±90° swivelling (VESA holder)
- ±180° rotatable (support arm)





HA Tablemount KB Single

Desktop Monitor Mount

- installation in portrait or landscape format possible, rotation to landscape or portrait format possible at any time without additional installation effort
- cable management with fixing via clips
- height adjustable (tool needed)
- clamp mounting or screw mounting possible
- ± 45° tiltable
- ± 45° swivelling
- ±180° rotatable







		recommended screen size			Load (max.)	Colour
8706	HA Tablemount KB Single	15 - 27" 38 - 68 cm	75 x 75 mm 100 x 100 mm	100 - 450 mm	10 kg	

HA Tablemount KB Dual

Desktop Monitor Mount

- for 2 screens "side-by-side"
- installation in portrait or landscape format possible, rotation to landscape or portrait format possible at any time without additional installation effort
- cable management with fixing via clips
- height adjustable (tool needed)
- clamp mounting or screw mounting possible
- ± 45° tiltable
- ± 15° swivelling
- ±180° rotatable



Item no.:	Item name	recommended screen size	VESA	Height	Load (max.)	Colour
8707	HA Tablemount KB Dual	15 - 27" 38 - 68 cm	75 x 75 mm 100 x 100 mm	100 - 450 mm	2x 10 kg	

HA Tablemount KB Triple

Desktop Monitor Mount

- for 3 screens "side-by-side"
- installation in portrait or landscape format possible, rotation to landscape or portrait format possible at any time without additional installation effort
- cable management with fixing via clips
- height adjustable (tool needed)
- clamp mounting or screw mounting possible
- ± 45° tiltable
- \pm 45° swivelling (only the two outer screens)
- ±180° rotatable



Item no.:	Item name	recommended screen size	VESA	Height	Load (max.)	Colour
8709	HA Tablemount KB Triple	15 - 27" 38 - 68 cm	75 x 75 mm 100 x 100 mm	100 - 450 mm	3x 8 kg	

HA Tablemount FS Dual

Free standing Desktop Monitor Mount

- for 2 screens "side-by-side"
- installation in portrait or landscape format possible, rotation to landscape or portrait format possible at any time without additional installation effort
- cable management with fixing via clips
- height adjustable (tool needed)
- tilt-resistant design foot
- ± 45° tiltable
- ± 15° swivelling
- ±180° rotatable



Item no.:		recommended screen size			Load (max.)	Colour
8708	HA Tablemount FS Dual	15 - 27" 38 - 68 cm	75 x 75 mm 100 x 100 mm	100 - 466 mm	2x 10 kg	

HA Tablemount FS Triple

Free standing Desktop Monitor Mount

- for 3 screens "side-by-side"
- installation in portrait or landscape format possible, rotation to landscape or portrait format possible at any time without additional installation effort
- cable management with fixing via clips
- height adjustable (tool needed)
- tilt-resistant design foot
- ±180° rotatable
- ± 45° tiltable
- ± 45° swivelling (only the two outer screens)



Item no.:		recommended screen size			Load (max.)	Colour
8710	HA Tablemount FS Triple	15 - 27" 38 - 68 cm	75 x 75 mm 100 x 100 mm	100 - 466 mm	3x 8 kg	

HA Cablecover Click 50

Aluminium cable cover

- keeps cables orderly and out of sight
- for wall mounting
- available in 3 colours
- mounting points at regular intervals on the back
- easy assembly and easy access thanks to a click mechanism
- can be shortened individually if necessary









Item no.:	Item name	Length	Width	Height	Colour
8800	HA Cablecover Click 50 Black	500 mm	60 mm	20 mm	
8801	HA Cablecover Click 50 Silver	500 mm	60 mm	20 mm	
8802	HA Cablecover Click 50 White	500 mm	60 mm	20 mm	

HA Cablecover Click 110

Aluminium cable cover

- keeps cables orderly and out of sight
- for wall mounting
- available in 3 colours
- mounting points at regular intervals on the back
- easy assembly and easy access thanks to a click mechanism
- can be shortened individually if necessary









Item no.:	Item name	Length	Width	Height	Colour
8803	HA Cablecover Click 110 Black	1100 mm	60 mm	20 mm	
8804	HA Cablecover Click 110 Silver	1100 mm	60 mm	20 mm	
8805	HA Cablecover Click 110 White	1100 mm	60 mm	20 mm	

Cable Management | cable socks

KS Self Wrap

Cable sock (KS), self wrapping

- self wrapping
- made of elastic polyester
- length can be individually adjusted
- fast and flexible installation of almost all types of cables possible
- clean appearance
- cables can be run in or out at any point





		The state of the s			
		Length	Width	Colour	
8821	KS Self Wrap Roll (Ø 19 mm 25 m black)	25 m	Ø 19 mm		
8826	KS Self Wrap Roll (Ø 19 mm 25 m white)	25 m	Ø 19 mm		
8825	KS Self Wrap (Ø 19 mm 5 m black)	5 m	Ø 19 mm		
8830	KS Self Wrap (Ø 19 mm 5 m white)	5 m	Ø 19 mm		
8831	KS Self Wrap Roll (Ø 38 mm 25 m black)	25 m	Ø 38 mm		
8836	KS Self Wrap Roll (Ø 38 mm 25 m white)	25 m	Ø 38 mm		
8835	KS Self Wrap (Ø 38 mm 5 m black)	5 m	Ø 38 mm		
8840	KS Self Wrap (Ø 38 mm 5 m white)	5 m	Ø 38 mm		

KS Velcro

Cable sock (KS) with velcro

- made of elastic polyester
- ideal for laying almost all types of cables sideways
- length can be individually adjusted
- cables can be run in and out at any point
- universal width for high cable volume (max. 85 mm)





	Y	MANUAL STREET,	S. D. S. P. S.	
Item no.:		Length	Width	Colour
8841	KS Velcro Roll (Ø 35 - 85 mm 50 m black)	50 m	Ø 35 - 85 mm	
8846	KS Velcro Roll (Ø 35 - 85 mm 50 m white)	50 m	Ø 35 - 85 mm	
8845	KS Velcro (Ø 35 - 85 mm 5 m black)	5 m	Ø 35 - 85 mm	
8850	KS Velcro (Ø 35 - 85 mm 5 m white)	5 m	Ø 35 - 85 mm	

KS Sleeve

Cable sock (KS), stretchable

- stretchable to twice the size
- made of elastic polyester
- length can be individually adjusted





	·	EMERICA CHESINA COLUMN	10000 900 00000	
Item no.:		Length		Colour
8851	KS Sleeve Roll (Ø 25 - 50 mm 50 m black)	50 m	Ø 25 - 50 mm	
8856	KS Sleeve Roll (Ø 25 - 50 mm 50 m white)	50 m	Ø 25 - 50 mm	
8855	KS Sleeve (Ø 25 - 50 mm 5 m black)	5 m	Ø 25 - 50 mm	
8860	KS Sleeve (Ø 25 - 50 mm 5 m white)	5 m	Ø 25 - 50 mm	
8861	KS Sleeve Roll (Ø 45 - 90 mm 50 m black)	50 m	Ø 45 - 90 mm	
8866	KS Sleeve Roll (Ø 45 - 90 mm 50 m white)	50 m	Ø 45 - 90 mm	
8865	KS Sleeve (Ø 45 - 90 mm 5 m black)	5 m	Ø 45 - 90 mm	
8870	KS Sleeve (Ø 45 - 90 mm 5 m white)	5 m	Ø 45 - 90 mm	

KS Zipper

Cable sock (KS) with zipper

- made of polyester
- ideal for installation of almost all types of cables
- cables are securely held together





Item no.:		Length		Colour
8871	KS Zipper (Ø 30 mm 1 m black)	1 m	Ø 30 mm	
8872	KS Zipper (Ø 30 mm 1 m white)	1 m	Ø 30 mm	
8873	KS Zipper (Ø 30 mm 2 m black)	2 m	Ø 30 mm	
8874	KS Zipper (Ø 30 mm 2 m white)	2 m	Ø 30 mm	
8875	KS Zipper (Ø 45 mm 1 m black)	1 m	Ø 45 mm	
8876	KS Zipper (Ø 45 mm 1 m white)	1 m	Ø 45 mm	
8877	KS Zipper (Ø 45 mm 2 m black)	2 m	Ø 45 mm	
8878	KS Zipper (Ø 45 mm 2 m white)	2 m	Ø 45 mm	






























Extract from our references:

- ► Adidas
- ► Agentur für Arbeit
- ► AIDA
- ► Allianz Arena (Munich)
- ► Allianz Arena (Vienna)
- ► AOK
- ► AUDI
- ► BAYArena (Leverkusen)
- ▶ Bayrischer Rundfunk
- ► Bertelsmann AG
- ► BMW (Munich)
- ► Bundesnachrichtendienst
- ▶ Daimler AG
- ► Deutscher Bundestag (Berlin)
- ► Deutsche Bank
- ► Douglas
- ► EDEKA

- ➤ Fitness-First
- ► FitX
- ► Formula 1 speedways in Sochi, Kuwait, Jeddah, Nürburgring
- ► Air ports incl. Frankfurt, Hannover, Hamburg, Munich, Cologne, Madrid, Barcelona
- ► Globus
- ► Hella (Lippstadt)
- ► Henkel AG
- ► Hygienemuseum (Dresden)
- ► Hyundai IT Europe GmbH
- ► KCM Milano (Italien)
- ► Kentucky Fried Chicken
- Kultur- und Kongresszentrum Liederhalle (Stuttgart)
- ► Kunsthalle (Bonn)

- ► LEVIS
- ► L'Oréal
- ▶ McFit
- ► Nordsee fish restaurants
- ▶ Opel
- ► PricewaterhouseCoopers (PWC)
- ► Palm (Dubai)
- ► Phonehouse (Netherlands)
- ► Philips
- ► PUMA
- ► Ramada Hotels
- ► REWE
- ► RheinEnergieSTADION (Cologne)
- ► SAP Arena (Hoffenheim)
- ► SchücoArena (Bielefeld)
- ► Siemens
- ► Signal Iduna Park (Dortmund)

- Spielbanken Duisburg & Hohensyburg
- ➤ Sport 2000
- ► Steigenberger
- St. Moritz Bäder AG (Switzerland)
- ► Tamaris
- ► T-Com
- ► Telekom
- ➤ T-Systems Enterprise Services
- Veltins Arena (Schalke)
- ▶ Vodafone
- ► Volksparkstadion (Hamburg)
- ➤ VW Volkswagen
- ► Waldorf Astoria Hotel (Berlin)
- Westpark Ingolstadt
- Wincor Nixdorf International
- ► Zio Technologies (Dubai)



Horst Hahndorf Management | CEO

Fon: +49 (0) 57 31 - 7 55 07 - 0 Fax: +49 (0) 57 31 - 7 55 07 - 61 Email: hagor@hagor.de



Sascha Hahndorf Management | CEO

Fon: +49 (0) 57 31 - 7 55 07 - 0 Fax: +49 (0) 57 31 - 7 55 07 - 61 Email: hagor@hagor.de



Hans Bahe Head of Sales

Fon: +49 (0) 57 31 - 7 55 07 - 37 Fax: +49 (0) 57 31 - 7 55 07 - 61 Mobile: +49 (0) 1 51 - 27 57 63 24 Email: bahe@hagor.de



Matthias Jonek

Sales



Marvin Kütemeier

Sales

Fon: 449 (0) 57 31 - 7 55 07 - 43 Fax: 449 (0) 57 31 - 7 55 07 - 61 Mobile: 449 (0) 1 51 - 10 08 03 67 Email: kuetemeier@hagor.de



Sarah Ebell

Sales

Fon: +49 (0) 57 31 - 7 55 07 - 33 Fax: +49 (0) 57 31 - 7 55 07 - 61 Mobile: +49 (0) 1 60 - 99 20 67 67 Email: ebell@hagor.de



Oberbecksener Straße 97 | D-32547 Bad Oeynhausen Telephone: +49(0)57 31-7 55 07-0 | Email: hagor@hagor.de



AV-MOUNTING - WE TAKE CARE